

河北广友橡胶制品制造有限公司 乐坦商贸有限公司

乐坦三元乙丙专用胶水

► 选型及使用

在选择三元乙丙胶水时，我们需要根据实际使用环境和需要，全面考虑粘结强度、耐水性和耐寒性等因素，选择最适合自己需求的胶水。

使用三元乙丙胶水时，我们需要在室温下进行，避免在低温环境下使用，同时要注意避免使用过量，以避免破坏材质表面。在使用过程中，可以将胶水均匀地涂抹在需要粘合的位置上，并且在使用过程中可以适当增加其他的镶嵌工具，保证粘结效果。

总之，选择好合适的三元乙丙胶水是保证粘接材质粘结效果的关键，同时在使用过程中要注意正确使用方法，保证胶水的粘结效果和使用寿命。



地址：河北省定州市北方循环经济示范园区经十三路001号

电话：苗先生15612913999(同微信) 王先生13331279292(同微信)



► 公司介绍

河北乐坦商贸有限公司成立于2020年07月15日，注册地位于河北省保定市莲池区焦庄乡南二环3635号美景东方11号底商。经营范围包括建材批发；五金产品，机械设备，电子产品，电气设备，橡胶制品，塑料制品，石墨批发、零售。

► 三元乙丙胶水的技术定义及应用领域

三元乙丙胶水是一种具有很高的粘性的胶水，具有优异的耐水性、耐低温性、粘结强度高保质期长等特点。它主要应用于三元乙丙密封胶条的固定，拼接，应用于高档门窗，沙发、木框架、各种高档木质家具、多层板、实木板材及各种木器加工中。因其优良的粘结性能和广泛的应用领域，三元乙丙胶水已经成为现代门窗，家具生产加工工艺中必不可少的一种材料。

► 三元乙丙胶水的种类和特点

1. 三元乙丙乳胶型胶水

三元乙丙乳胶型胶水可以快速干燥，在使用过程中不会产生异味，贴合性能好，粘结强度高，耐水性能佳。但其不适用于需要长时间曝露在阳光下的工作环境。

2. 三元乙丙合成型胶水


三元乙丙合成型胶水是一种高分子材料，具有很高的耐水性和气密性，在长时间曝露在阳光下的情况下，也能保持较好的粘结效果。其粘结强度相对较好，适用于一些对粘结强度要求较高的应用场合。目前专业用于粘接三元乙丙胶条密封条，门窗行业当中！

3. 三元乙丙膜型胶水

三元乙丙膜型胶水是一种可以在较薄的层次内起到很好的粘结效果的胶水，具有很高的耐寒性和耐水性。但其粘结强度比较低，适用于对粘结强度要求不高的应用场合。

廣友橡膠
GUANG YOU XIANG JIAO

HEBEIGUANGYOU Co. Ltd

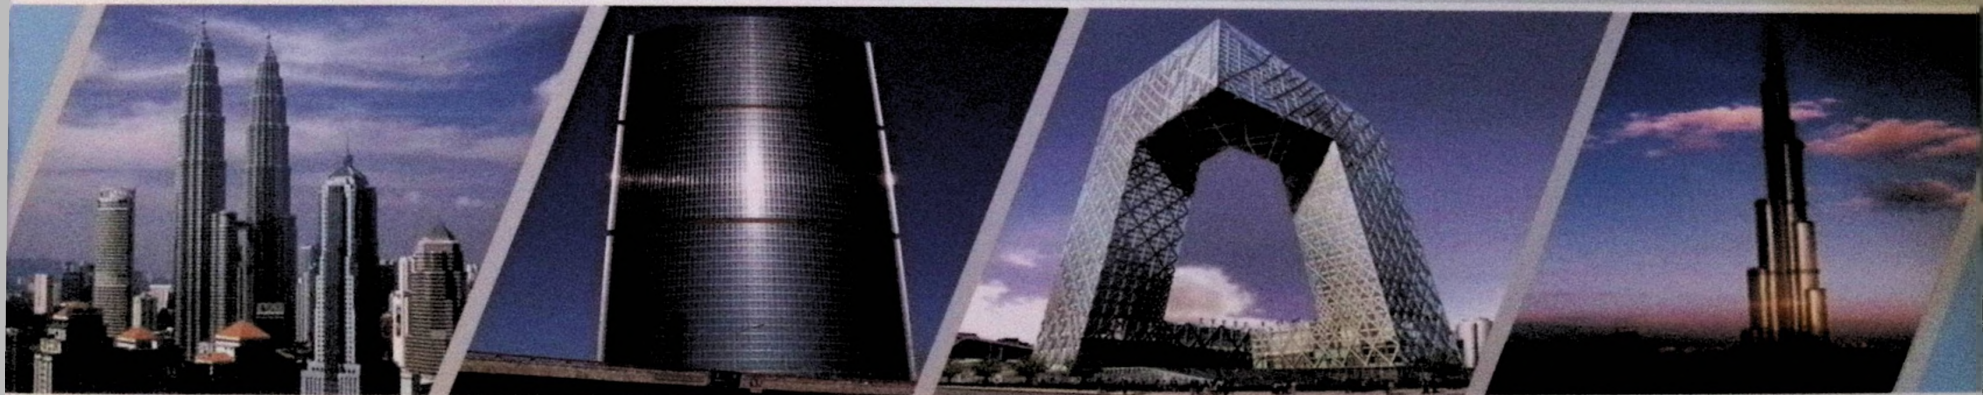

中国·河北

河北广友橡胶制品制造有限公司



公司简介

河北广友橡胶制品制造有限公司，坐落于河北省定州市周村镇，紧邻石家庄，北京，天津 与雄安新区！是一家专业生产高端橡胶制品的现代化、创新型、企业。产品涵盖工程建设、汽车制造船舶集装箱、高铁地铁、高端门窗等橡胶密封制品，服务于多个领域，产品在行业内享有极高的美誉度。河北广友橡胶制品制造有限公司注册资金500万元，共有员工70余人，其中高级技术人员3，另有高级工程师2名曾派遣到德国学成归来，技术力量雄厚。

公司拥有国内一流的生产线8条，年产高端门窗幕墙密封条10000余吨、汽车用密封胶条600多万套，另有多套专业检测设备以保证产品质量。

公司秉承“勤奋求实、精益求精”的态度，用高品质的产品、优秀的售后服务与您携手共创美好未来。

客服电话 | 0312-2122251
Customer service call



廣友橡膠
GUANG YOU XIANG JIAO

■ 销售覆盖 Sales coverage



■ 国内重点客户，公司派员跟踪服务，
办事处省内二十四小时到达现场，省外
四十八小时到达现场，为用户提供满意及时的优质服务。

Key domestic customers, the company sent personnel tracking service, the office of the province
24 hours to the scene, the province 48 hours to the scene, to provide users with satisfactory and
timely quality services.


02 \\\\\\\ 因为专业 · 所以更好
Because professional · so better

廣友橡膠
GUANG YOU XIANG JIAO



防火窗、耐火窗高端密封制品专业制造商
Fire window, fire window high-end sealing products manufacturer

■ 先进质检 Advanced quality inspection

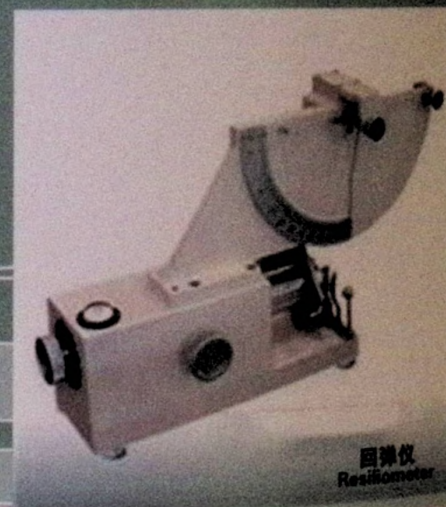


河北广友橡胶制品有限公司 03
Hebei guangyou rubber products co., ltd

客服电话 | 0312-2122251
Customer service call




廣友橡膠
GUANG YOU XIANG JIAO

■ 先进的生产开发 Advanced production development

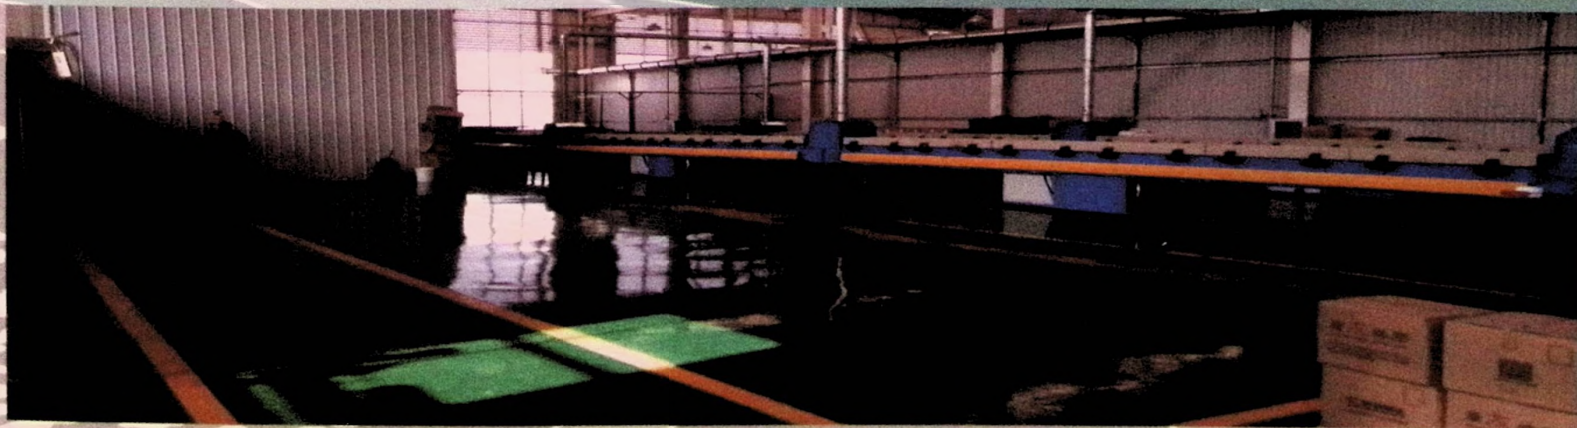

04\\\\\\\\ 因为专业 · 所以更好
Because professional · so better

廣友橡膠
GUANG YOU XIANG JIAO

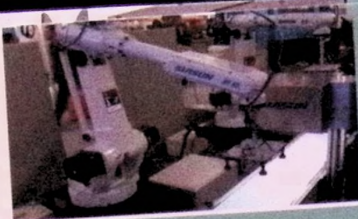

防火窗、耐火窗高端密封制品专业制造商
Fire window, fire window high-end sealing products manufacturers

■ 先进的生产开发 Advanced production development




河北广友橡胶制品有限公司 \\\\\\\ 05
Hebei guangyou rubber products co., ltd

客服电话 | 0312-2122251
Customer service call



廣友橡膠
GUANG YOU XIANG JIAO

■ 先进的生产开发 Advanced production development

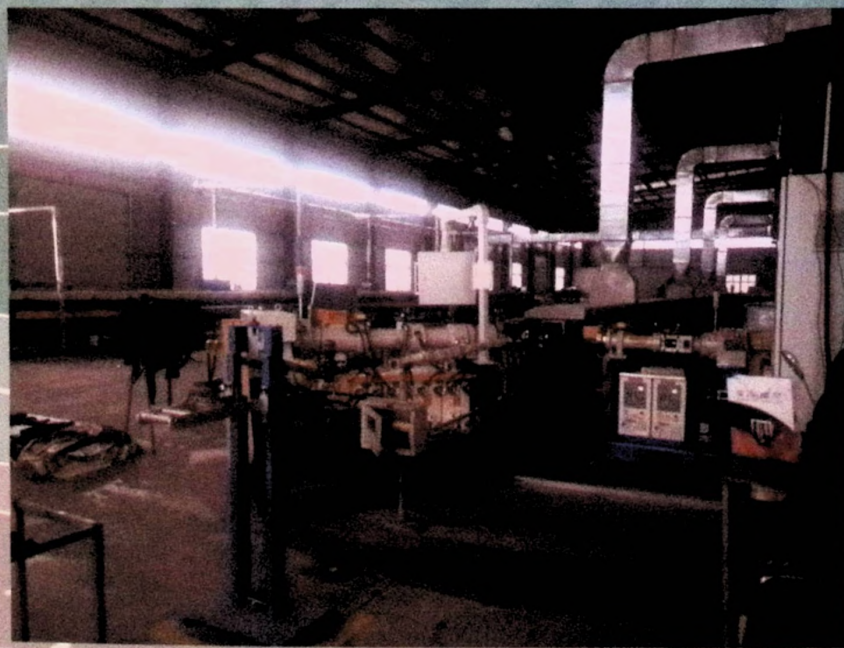

先进的三元乙丙设备流水线
The advanced epdm equipment assembly line

大型的平板硫化设备
Large plate vulcanizing equipment



06\\\\\\\\ 因为专业 · 所以更好
Because professional · so better




■ 广泛的应用 *Wide market application*



Aircraft
飞机



Ship
船舶

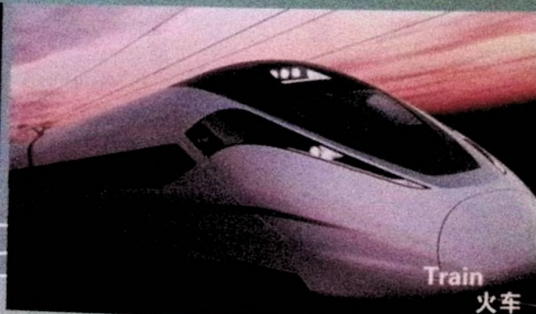

Train
火车



Car
汽车



Chinese air door window
中国风门窗



High-end aluminum wood doors and windows
高端铝木门窗



Sun room
阳光房

客服电话
Customer service call

0312-2122251


关爱生命
从窗做起

廣友橡膠
GUANG YOU XIANG JIAO


■ 遇火膨胀密封胶条 Expansion sealing rubber strip in case of fire



膨胀固化胶条 (30倍膨胀)
Expansion curing strip

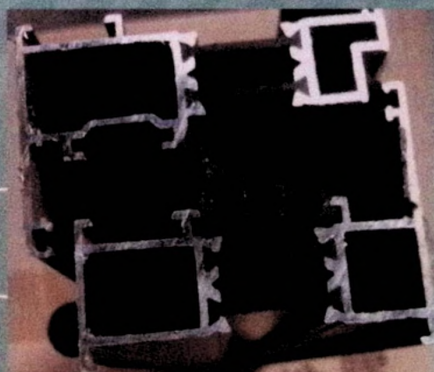


未燃烧窗户断面
Unburned window section

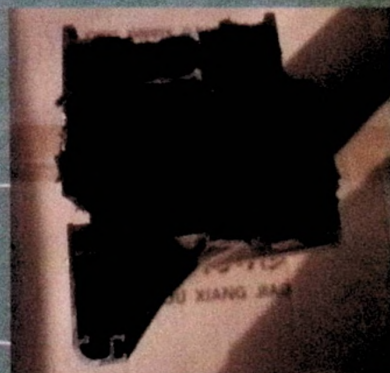

燃烧后窗户断面
Section of window after combustion




包装膜伤害很小膨胀条作用明显
Packaging film damage is very small expansion strip effect is obvious

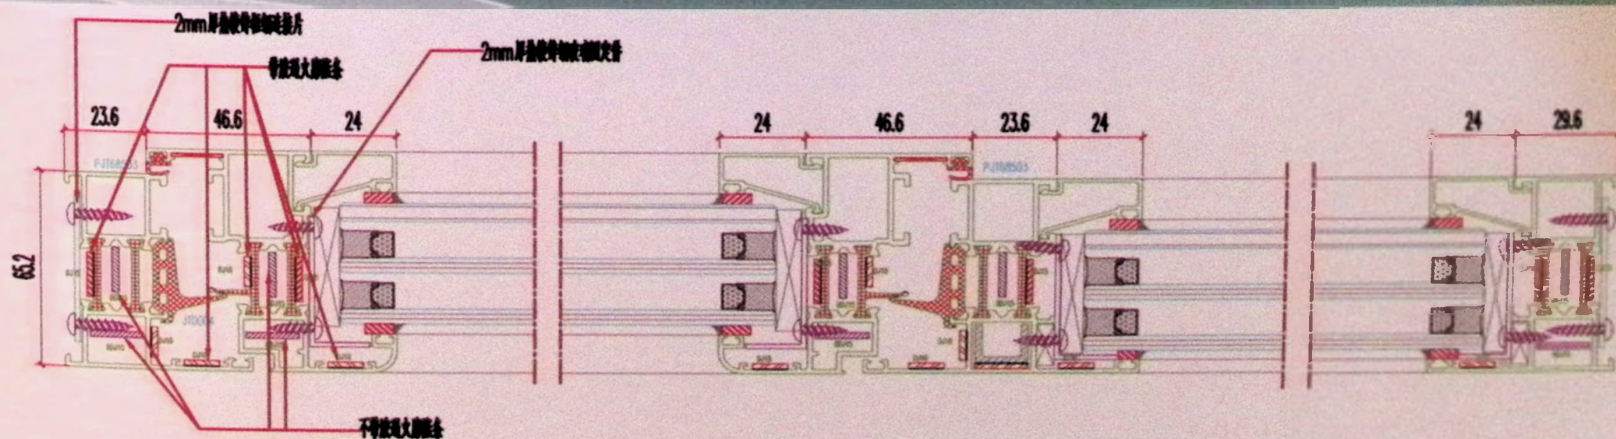

耐火窗、防火窗1小时方案参考

08 \\\\\\\ 因为专业 · 所以更好
Because professional · so better

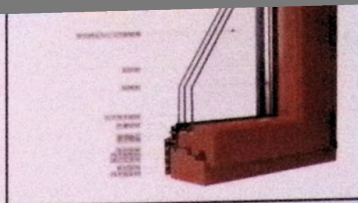

■ 防火耐火窗合理设计 Reasonable design of fireproof and fireproof window

■ 防火（遇火）膨胀密封胶条的介绍及应用

防火膨胀密封条主要用于防火门窗产品的门与门、门与框之间，当一个房间着火时，温度到达一定值时，以隔绝两个房间之间的空气流通，防止火焰蔓延。该产品的应用取代了以前国内防火门窗缝隙用石棉绳，并经国家固定灭火系统和耐火构件质量监督检测中心检测，各项指标均合格。

该产品除具有优良的防火膨胀性能外，其良好的柔性，赋予它优良的密封、防震性能。同时由于采用挤出工艺，因此可根据用户要求制成各种形状和任意长度的柔性防火膨胀密封条，从而为用户的应用提供了方便。该产品常规尺寸为：2mmX15mm，2mmX20mm，2mmX25mm。（可配合客户指定尺寸）。

防火膨胀密封条的特点：





- 1、防火膨胀密封条用料处理考究，纯度高，受火膨胀倍数大。
- 2、防火密封条受火膨胀后有一定的粘度，不会被火焰带走，密封效果好。
- 3、防火膨胀密封条加工考究，尺寸精确，各种规格齐全，并可根据用户要求规格进行生产，减少用户在生产中的损失。
- 4、被动消防（被动防火）其本身并无灭火效应，它是用在火灾已经发生的场合阻止火势蔓延，达到防止生命和财产损失的目的。

■ introduction and application of intumescent sealing strip for fire protection


The fireproof expansion sealing strip is mainly used between the door and the door frame, the frame of the fireproof door and window product, and when one room is on fire, the temperature reaches a certain value, so as to isolate the air circulation between the two rooms and prevent the fire from spreading. The application of this product replaces the asbestos rope used in the past in fireproof doors and windows in China before, and has been tested by the national fixed fire extinguishing system and the quality supervision and testing center of fire-resistant components, and all the indicators are qualified. In addition to its excellent fire-proof and expansion properties, the product has good flexibility, excellent sealing and shock-proof properties. Meanwhile, because the extrusion process is used, it can be made into various shapes and any length according to the requirements of the user, thereby providing convenience for the application of the product. The general dimensions of this product are 2 mm x 15 mm, 2 mm x 20 mm, 2 mm x 25 mm (can be matched with customer specified dimensions).

Characteristics of fireproof expansion sealing strip:

1. fire expansion sealing strip material processing research, high purity, by fire expansion multiple.
2. the fire-proof sealing strip has certain viscosity after being expanded by fire, and can not be taken away by flame, so the sealing effect is good.
3. fire expansion sealant processing research, accurate size, complete specifications, according to the requirements of the user specifications for production, reduce the loss of users production.
4. passive fire (passive fire) itself has no fire extinguishing effect, it is used in the fire has occurred to prevent the spread of the fire, to prevent the loss of life and property.

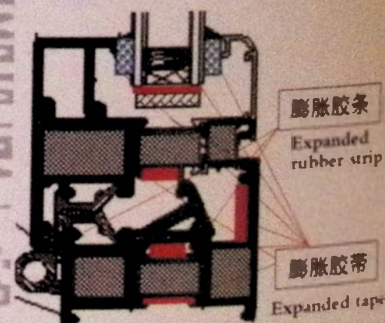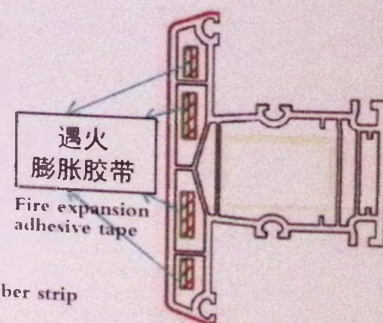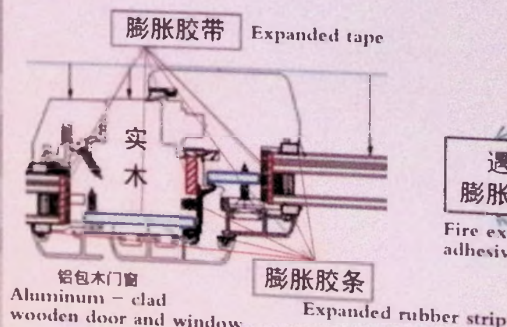
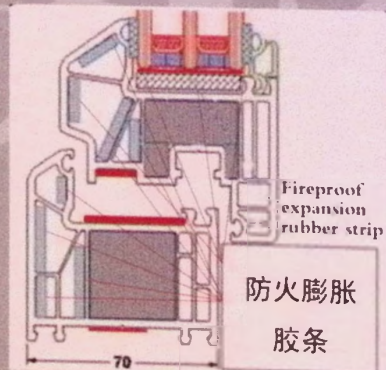


客服电话 | 0312-2122251
Customer service call

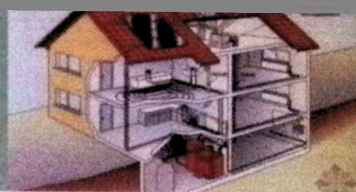

廣友橡膠
GUANG YOU XIANG JIAO


■ 节能门窗密封制品 Energy - saving door and window sealing product

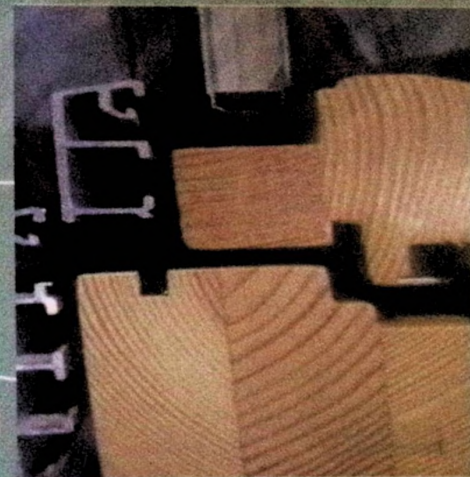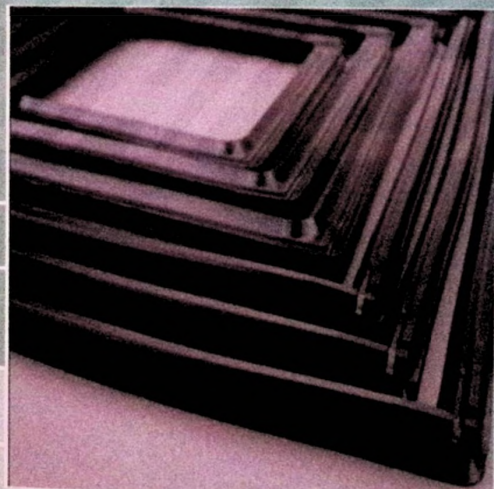

10 \\\\\\\ 因为专业 · 所以更好
Because professional · so better



■ 部分产品截面图 Partial product sectional view

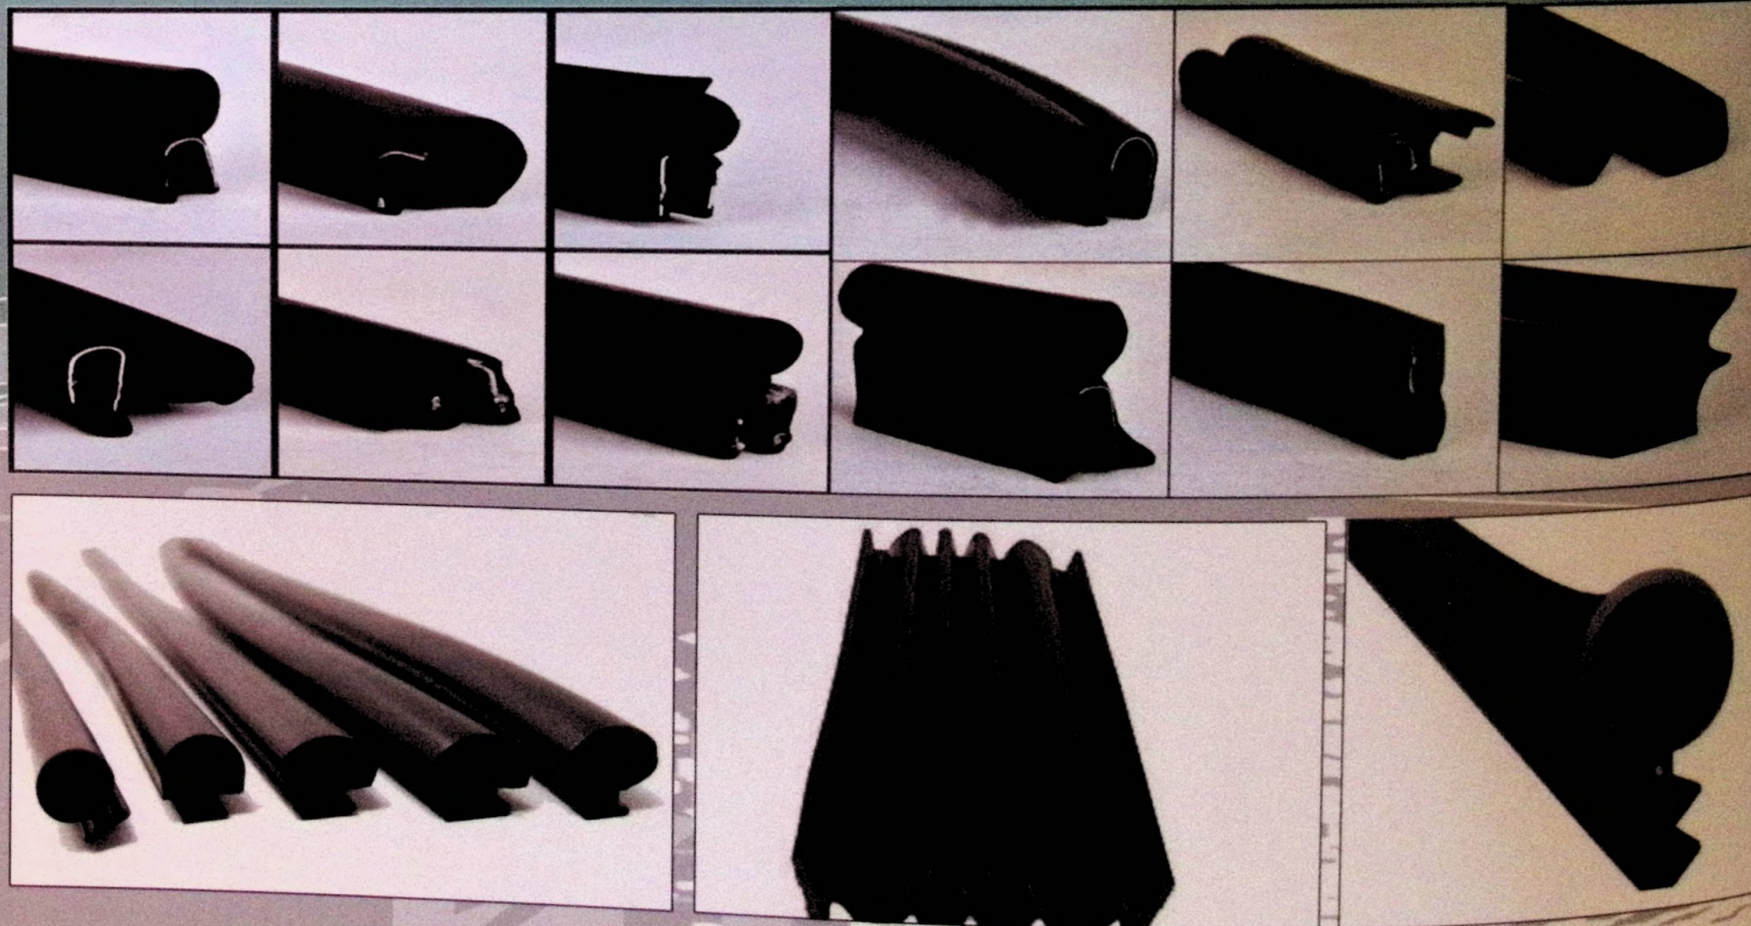

客服电话
Customer service call

0312-2122251

廣友橡膠
GUANG YOU XIANG JIAO




■ 部分产品截面图 Partial product sectional view



12 \\\\\\\ 因为专业 · 所以更好
Because professional · so better



■ 部分产品截面图 Partial product sectional view

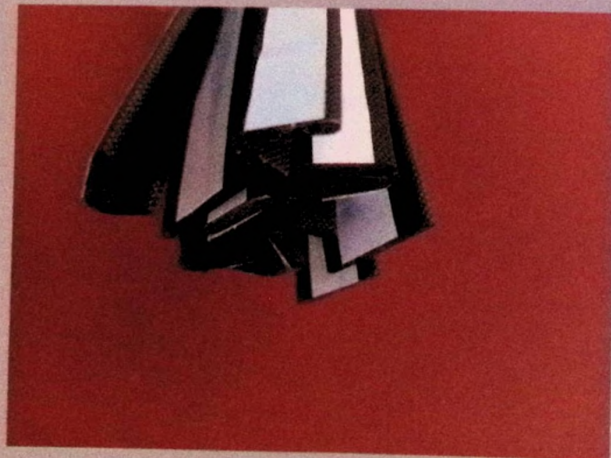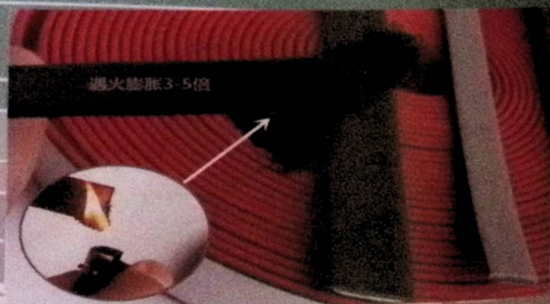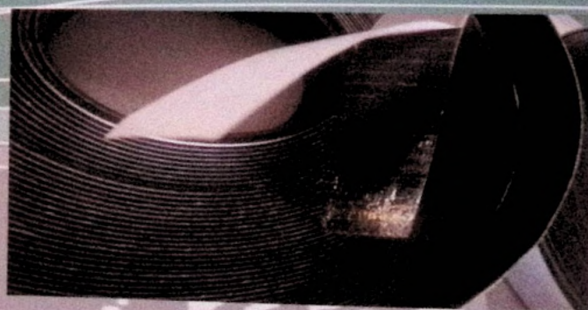


客服电话 | 0312-2122251
Customer service call



廣友橡膠
GUANG YOU XIANG JIAO


■ 部分产品截面图 Partial product sectional view

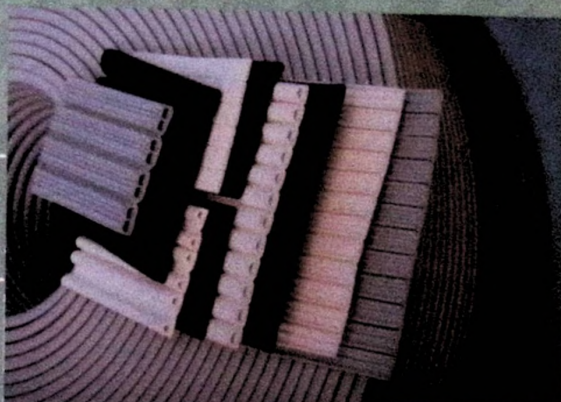

14 \\\\\\\ 因为专业 · 所以更好
Because professional · so better



■ 部分产品截面图 Partial product sectional view

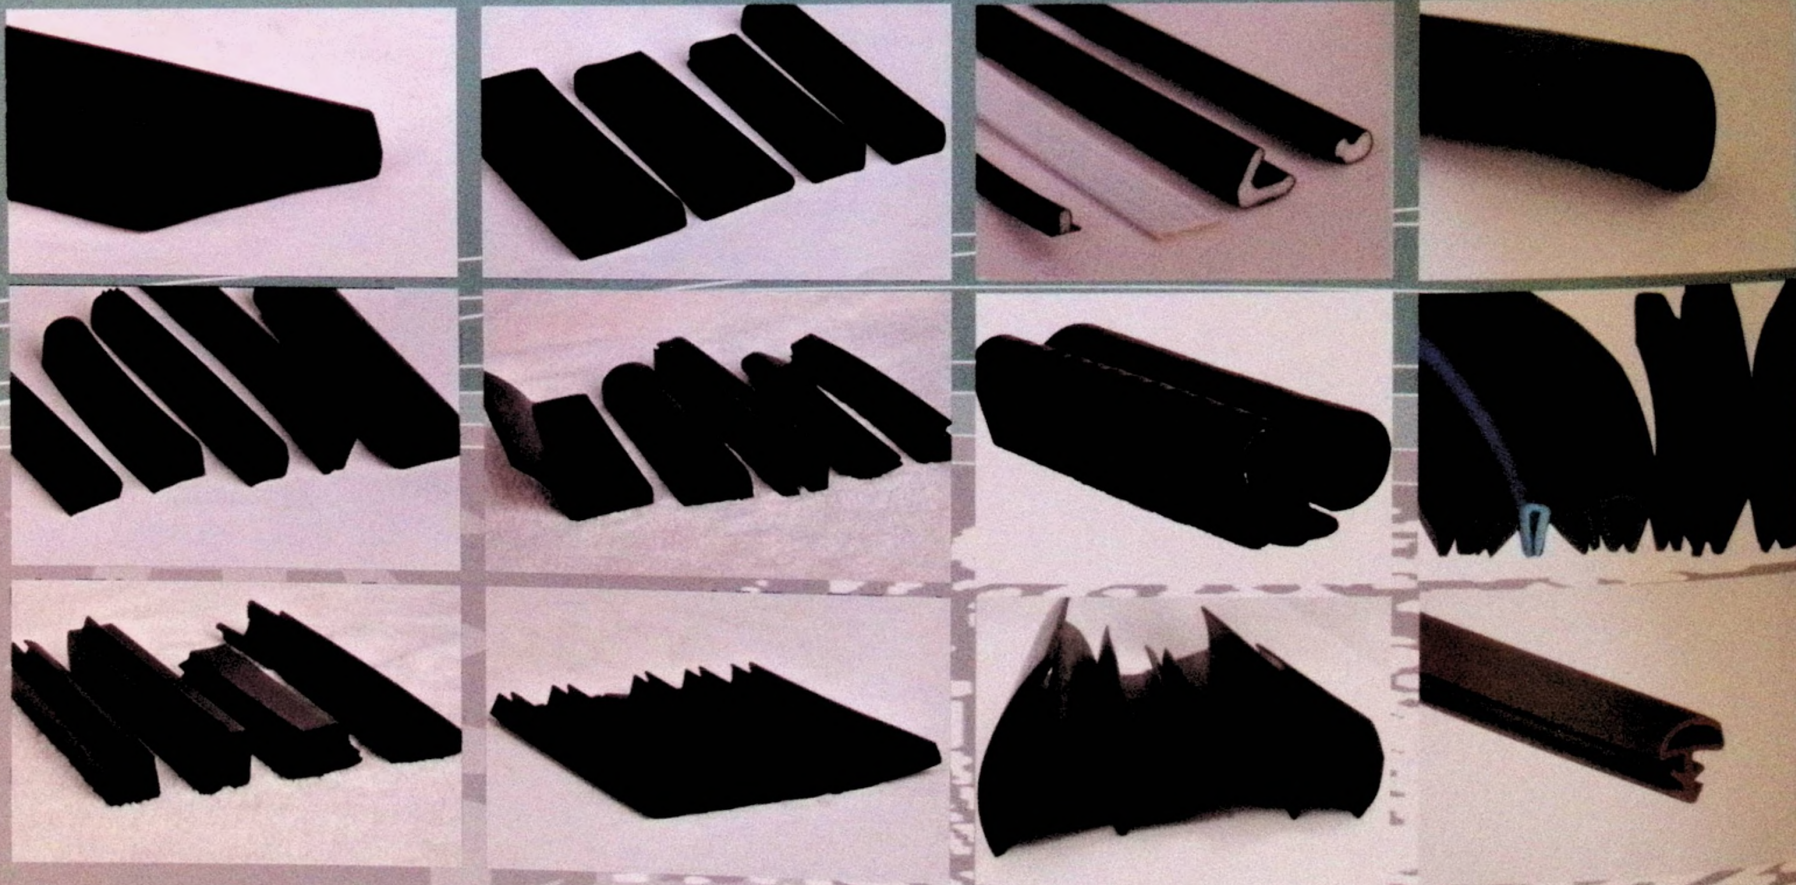





客服电话
Customer service call

0312-2122251



廣友橡膠
GUANG YOU XIANG JIAO

■ 部分产品截面图 Partial product sectional view

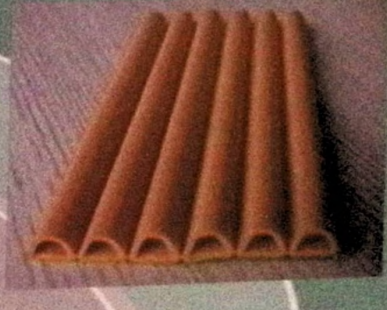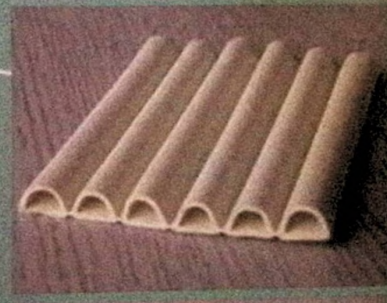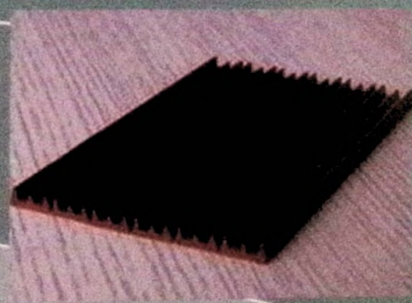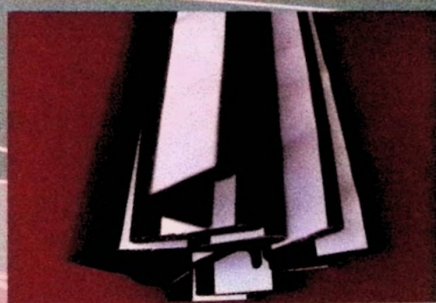


16 因为专业 · 所以更好
Because professional · so better




■ 铝包木密封胶条 Aluminum - clad wood sealing rubber strip

A尺寸4-6之间, B尺寸5-7之间, C尺寸4-6之间, 克重为35-45g/m, 此胶条适用于铝木复合开启部位密封条。



A size between 4 - 6, b size between 5 - 7, c size between 4 - 6, weight of 35 - 45 g / m, this tape is suitable for aluminum-wood composite open parts of the sealing strip.

A尺寸4-6之间, B尺寸5-7之间, C尺寸6-8之间, 克重为25-35g/m, 此胶条适用于铝木复合卡槽密封条。




A size between 4 - 6, b size between 5 - 7, c size between 6 - 8, weight of 25 - 35 g / m, this tape is suitable for aluminum-wood composite groove sealing strip.

A尺寸8-10之间, B尺寸10-12之间, C尺寸14-16之间, 克重为100-120g/m, 此胶条适用于铝木复合主档水密封条。




A size between 8 - 10, b size between 10 - 12, c size between 14 - 16, weight of 100 - 120 g / m, this tape is suitable for aluminum-wood composite main water sealing strip.

A尺寸4-5之间, B尺寸6-8之间, C尺寸8-10之间, 克重为30-40g/m, 此胶条适用于铝木复合开启部位密封条。




A size between 4 - 5, b size between 6 - 8, c size between 8 - 10, weight of 30 - 40 g / m, this tape is suitable for aluminum-wood composite open parts of the sealing strip.

复合胶条软硬复合, 在功能面上采用发泡技术使胶条柔软, 密封性能大幅度增加, 此胶条适用于高档铝木型材, 模具费2000元/副。




The composite rubber strip is soft and hard compounded, and the foaming technology is adopted on the functional surface, so that the rubber strip is softer and the sealing performance is greatly increased, and the rubber strip is suitable for high-grade aluminum-wood sections. Mold fee 2000 yuan / pair.

A尺寸3-4之间, B尺寸6-8之间, C尺寸15-20之间, 克重为80-100g/m, 模具费600元/副, 此胶条适用于铝木复合主密封条。




A size between 3 - 4, b size between 6 - 8, c size between 15 - 20, weight of 80 - 100 g / m, mold cost 600 yuan / pair, this tape is suitable for aluminum-wood composite main sealing strip.

A尺寸4-5之间, B尺寸5-6之间, C尺寸4-6之间, 克重为30-40g/m, 此胶条适用于铝木复合开启部位密封条。




A size between 4 - 5, b size between 5 - 6, c size between 4 - 6, weight of 30 - 40 g / m, this tape is suitable for aluminum-wood composite open parts of the sealing strip.

A尺寸8-10之间, B尺寸22-25之间, C尺寸10-12之间, 克重为100-120g/m, 此胶条适用于铝木复合开启部位密封条。




A size between 8 - 10, b size between 22 - 25, c size between 10 - 12, weight of 100 - 120 g / m, this tape is suitable for aluminum-wood composite open parts of the sealing strip.

A尺寸7-9之间, B尺寸15-20之间, 克重为40-60g/m, 此胶条适用于铝木复合玻璃外型材。




A size between 7 - 9, b size between 15 - 20, weight of 40 - 60 g / m, this tape is suitable for aluminum-wood composite glass profile.

复合胶条软硬复合, 在功能面上采用发泡技术使胶条柔软, 密封性能大幅度增加, 此胶条适用于高档铝木型材, 模具费2000元/副。




The composite rubber strip is soft and hard compounded, and the foaming technology is adopted on the functional surface to make the rubber strip softer and the window sealing performance significantly increased. Mold fee 2000 yuan / pair.

A尺寸7-9之间, B尺寸15-20之间, 克重为40-60g/m, 此胶条适用于铝木复合玻璃外型材。




A size between 7 - 9, b size between 15 - 20, weight of 40 - 60 g / m, this tape is suitable for aluminum-wood composite glass profile.

A尺寸4-5之间, B尺寸5-6之间, C尺寸4-6之间, 克重为50-60g/m, 此胶条适用于铝木复合玻璃外型材。




A size between 4 - 5, b size between 5 - 6, c size between 4 - 6, weight of 50 - 60 g / m, this tape is suitable for aluminum-wood composite glass profile.

A尺寸3-4之间, B尺寸12-15之间, C尺寸5-7之间, 克重为80-100g/m, 此胶条适用于铝木复合主密封条。




A size between 3 - 4, b size between 12 - 15, c size between 5 - 7, weight of 80 - 100 g / m, this tape is suitable for aluminum-wood composite main sealing strip.

A尺寸3-5之间, B尺寸4-6之间, C尺寸10-12之间, 克重为60-80g/m, 此胶条适用于铝木复合玻璃内封条。



A size between 3 - 5, b size between 4 - 6, c size between 10 - 12, weight of 60 - 80 g / m, this tape is suitable for aluminum-wood composite glass inner seal.

聚烯烃胶条是在产品中加入聚烯烃, 这样胶条就不容易收缩, 适用于所有高窗/门及幕墙, 模具费1500元/副。



Polyester line tape is to add polyester line in the product, so that the tape is not easy to shrink, applicable to all high-end doors and windows and curtain wall, mold cost 1500 yuan / pair.


客服电话
Customer service call

0312-2122251

廣友橡膠
GUANG YOU XIANG JIAO


部分产品截面图 Partial product sectional view

尺寸4-5之间, 尺寸5-7之间, CR尺寸4-6之间, 克重为35-45g/m, 此胶条适用于单元体块幕墙拼接处。




A size between 4-5, b size between 5-7, c size between 6-8, the weight of 35-45 g/m, this tape is suitable for unit body panel curtain wall splicing.

尺寸4-5之间, 尺寸5-6之间, CR尺寸3-5之间, 克重为30-40g/m, 此胶条适用于单元体块幕墙拼接处。




A size between 4-5, b size between 5-6, c size between 3-5, weight of 30-40 g/m, this tape is suitable for unit body panel curtain wall splicing.

尺寸3.5-4.5之间, 尺寸4-5之间, CR尺寸4-5之间, 克重为30-40g/m, 此胶条适用于单元体块幕墙拼接处。




A size between 3.5-4.5, b size between 4-5, c size between 3-5, weight of 30-40 g/m, this tape is suitable for unit body panel curtain wall splicing.

尺寸4-5之间, 尺寸5-6之间, CR尺寸3-5之间, 克重为40g/m, 此胶条适用于单元体块幕墙拼接处。




A size between 4-5, b size between 5-6, c size between 3-5, weight of 40-60 g/m, this tape is suitable for unit body panel curtain wall splicing.

尺寸2.5-3.5之间, 尺寸4-6之间, CR尺寸20-25之间, 克重为30-40g/m, 此胶条适用于单元体块幕墙拼接处。




A size between 2.5-3.5, b size between 4-6, c size between 20-25, weight of 30-40 g/m, this tape is suitable for unit body panel curtain wall splicing.

尺寸3.5-4.5之间, 尺寸4-5之间, CR尺寸3-5之间, 克重为30-40g/m, 此胶条适用于单元体块幕墙拼接处。




A size between 3.5-4.5, b size between 4-5, c size between 3-5, weight of 30-40 g/m, this tape is suitable for unit body panel curtain wall splicing.

尺寸3.5-4.5之间, 尺寸4-5之间, CR尺寸12-15之间, 克重为30-40g/m, 此胶条适用于单元体块幕墙拼接处。




A size between 3.5-4.5, b size between 4-5, c size between 12-15, the weight of 30-40 g/m, this tape is suitable for the column inside profiles.

尺寸3.5-4.5之间, 尺寸4-5之间, CR尺寸4-5之间, 克重为30-40g/m, 此胶条适用于单元体块幕墙拼接处。




A size between 3.5-4.5, b size between 4-5, c size between 4-5, the weight of 30-40 g/m, this tape is suitable for certain wall column profile outside.

尺寸2.5-3.5之间, 尺寸4-6之间, CR尺寸4-5之间, 克重为30-40g/m, 此胶条适用于单元体块幕墙拼接处。




A size between 2.5-3.5, b size between 4-6, c size between 4-5, the weight of 30-40 g/m, this tape is suitable for unit body panel curtain wall splicing.

尺寸3.5-4.5之间, 尺寸4-5之间, CR尺寸4-5之间, 克重为30-40g/m, 此胶条适用于单元体块幕墙拼接处。




A size between 3.5-4.5, b size between 4-5, c size between 8-10, weight of 50-70 g/m, this tape is suitable for curtain wall column profile outside.

尺寸3.5-4.5之间, 尺寸4-5之间, CR尺寸4-5之间, 克重为30-40g/m, 此胶条适用于单元体块幕墙拼接处。




A size between 3.5-4.5, b size between 4-5, c size between 4-5, the weight of 20-30 g/m, this tape is commonly used in the unit panel curtain wall splicing.

尺寸3.5-4.5之间, 尺寸4-5之间, CR尺寸4-5之间, 克重为30-40g/m, 此胶条适用于单元体块幕墙拼接处。



A size between 3.5-4.5, b size between 4-5, c size between 8-10, weight of 30-40 g/m, this tape is suitable for the column inside the profile.

硅橡胶密封条, 主要用于幕墙玻璃, 特别适用于特殊要求高的地区。




Silicone rubber sealing strip is mainly used in bar and cold areas, especially in areas with high seismic requirements.

氯丁橡胶条, 在甲力胶定温环境下使用, 特别适用于防火工程建筑。



Neoprene sealing strip, used when party is specified for fireproof materials, especially for fire protection engineering buildings.

EPDM密封条, 在甲力胶定温环境下使用, 特别适用于高层建筑。



EPDM sealing strip, used when party is specified for fireproof materials, especially for high-rise buildings.

18 因为专业 · 所以更好
Because professional · so better



■ 铝包木密封设计 Seal design of aluminum clad wood

采用三元乙丙橡胶的优良特性，
使门窗长期密封更加优良，
合理的设计使门窗密封性更加优良。




The excellent characteristics of ethylene propylene diene monomer rubber are adopted, So that that long-term seal of the doors and window is better. The reasonable design makes the door and window sealing more excellent.

玻璃内外侧胶条采用复合材质使其起到优良的密封性

The glass inner and outer rubber strips are made of composite materials. The quality makes it excellent in sealing property.

多腔体设计中中间密封更加优良

The intermediate seal of that multi-cavity design is more excellent.

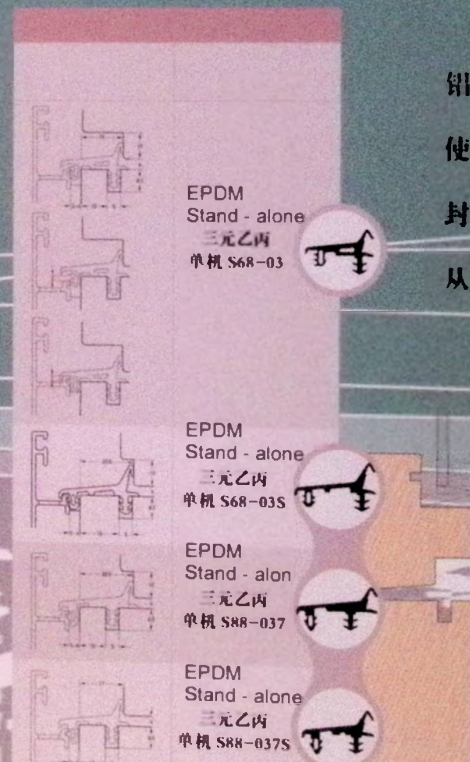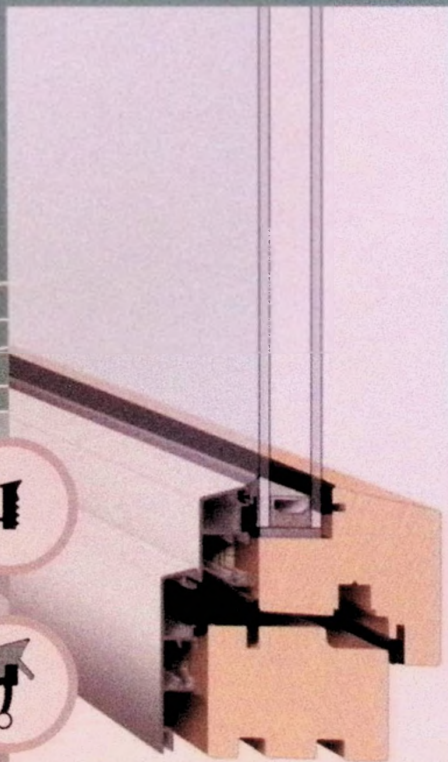


铝包木中间密封胶条的合理设计
使中间密封胶条起到最优良的密封作用。

从而优化风压、水密、气密的性能

The reasonable design of aluminum wood intermediate sealing strip the intermediate sealing strip best seating role. So as to optimize the performance: wind pressure, water tightness, tightness.

客服电话 | 0312-2122251
Customer service call

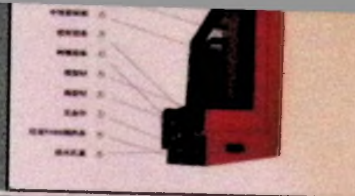

廣友橡膠
GUANG YOU XIANG JIAO

■ 玻璃内外侧密封胶条的合理设计 Reasonable design of glass inner and outer sealing strip

玻璃内外侧复合密封胶条合理的设计，

从而使门窗的 U 值降到更低。

使 PHI 判定更低。

Reasonable design of compound sealant strip inside and outside glass, thereby lowering the u value of the door and window to a lower value. Lower the phi decision.

EPDM Composite 三元乙丙复合 BLJT68-04	
EPDM Composite 三元乙丙复合 BLJT68-04S	
EPDM Composite 三元乙丙复合 BLJT88-47	
EPDM Composite 三元乙丙复合 BLJT88-47S	

EPDM Composite 三元乙丙复合 BLJT2249	
EPDM Composite 三元乙丙复合 BLJT2264	
EPDM Composite 三元乙丙复合 BLJT2259	
EPDM Composite 三元乙丙复合 BLJT2265	
EPDM Composite 三元乙丙复合 BLJT2372	

放心的选择

我们的建议

合理的设计

优良的性能

专业的力量

完善的服务

永远的朋友

Rest assured choice

Our suggestion

Reasonable design


Excellent properties

Professional strength

Perfect service

20\\\\\\\\ 因为专业 · 所以更好
Because professional · so better

■ 塑钢与实木部分密封产品设计

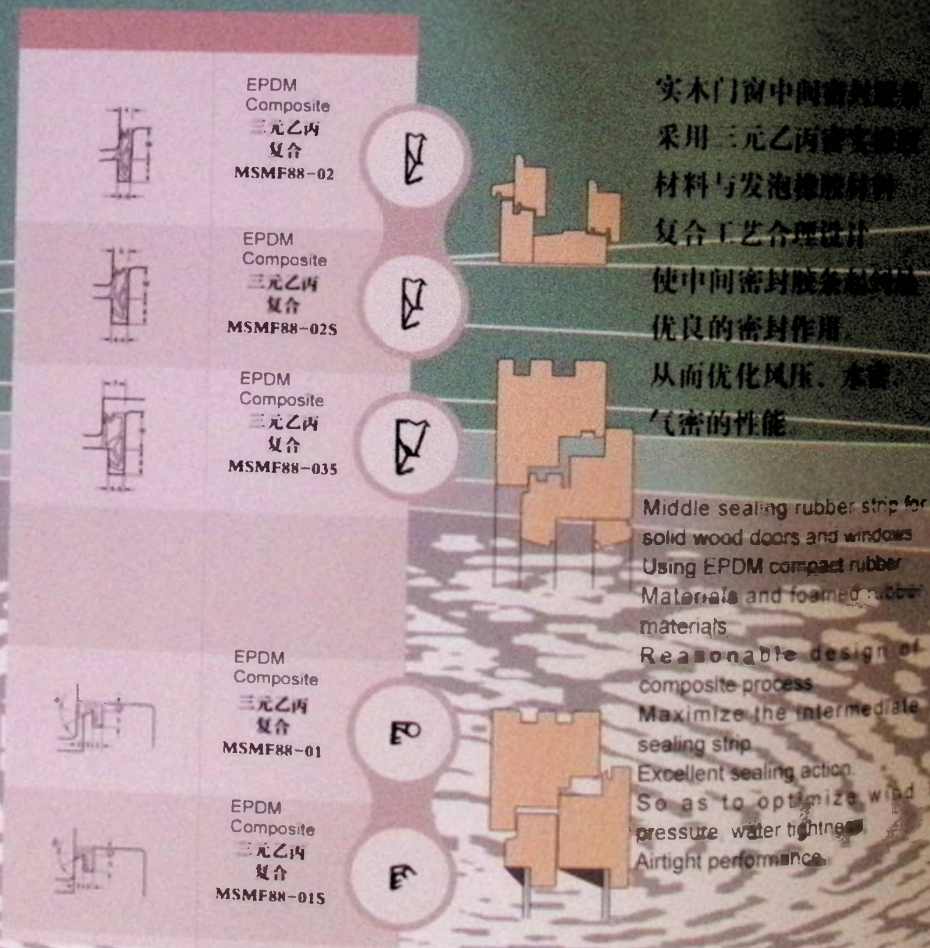

客服电话
Customer service call

0312-2122251

木窗型材
密封胶条
密封胶条
密封胶条
密封胶条
五金配件
木窗型材



廣友橡膠
GUANG YOU XIANG JIAO

■ 实木密封胶条设计 Design of solid wood sealing strip




EPDM
Composite
三元乙丙
复合
MSMF78-78




EPDM
Composite
三元乙丙
复合
MSMF78-79








EPDM
Composite
三元乙丙
复合
MSMF78-80



EPDM
Composite
三元乙丙
复合
MSMF78-81



EPDM
Composite
三元乙丙
复合
MSMF78-82








EPDM
Composite
三元乙丙
复合
MSMF80-01

EPDM
Composite
三元乙丙
复合
MSMF80-02

EPDM
Composite
三元乙丙
复合
MSMF80-03

EPDM
Composite
三元乙丙
复合
MSMF80-04

EPDM
Composite
三元乙丙
复合
MSMF80-05



放心的选择

我们的建议

合理的设计

优良的性质

专业的力量

完善的服务

永远的朋友

Rest assured choice

Our suggestion

Reasonable design

Excellent properties

Professional strength





Perfect service

Forever friend

22\\\\\\\\ 因为专业 · 所以更好
Because professional · so better



■ 部分工程案例 Some engineering cases

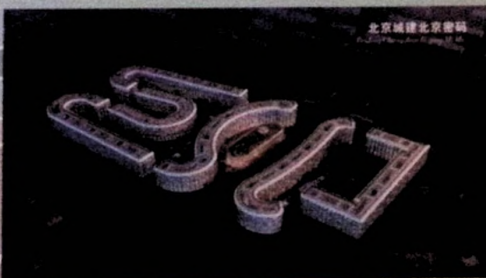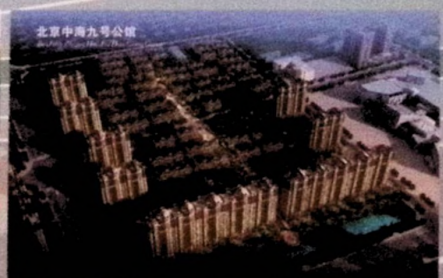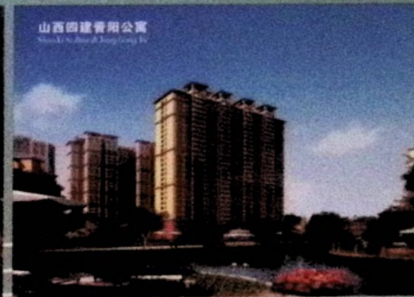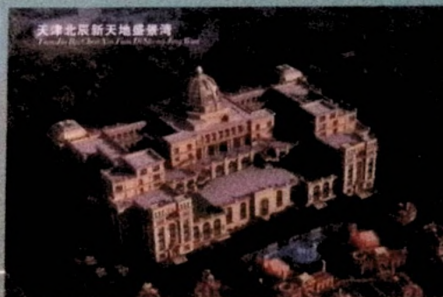

客服电话 | 0312-2122251
Customer service call



廣友橡膠
GUANG YOU XIANG JIAO

■ 部分工程案例 Some engineering cases



北京普光伏能大道
Beijing Chun Guang Fu Xi Dao Dao



河南鸿宝园林玉兰苑
He Nan Hong Bao Yuan Lin Yu Lan Yuan



北京顺德花溪园
Beijing Shun De Hua Xi Yuan



安徽万科兰溪里
Anhui Wan Ke Lan Xi Li



安徽兴茂悦然南山
Anhui Xing Mai Yue Ran Nan Shan



北京万科金域缇香
Beijing Wan Ke Jin Yu Ti Xiang



嘉友轩置西安院子
Jia You Xuan Zhi Xi An Yuan Zi



北京普光伏能大道
Beijing Chun Guang Fu Xi Dao Dao



北京普光伏能大道
Beijing Chun Guang Fu Xi Dao Dao



河南鸿宝园林玉兰苑
He Nan Hong Bao Yuan Lin Yu Lan Yuan



北京顺德花溪园
Beijing Shun De Hua Xi Yuan

24 \\\\\\\ 因为专业 · 所以更好
Because professional · so better

廣友橡膠
GUANG YOU XIANG JIAO



防火窗、耐火窗高端密封制品专业制造商
Fire window, fire window high-end sealing products manufacturer

站在用戶
角度
做每一件事情

Standing in the user Angle do every thing

河北廣友橡膠製品有限公司

Hebei Guangyou Rubber Products Co., Ltd.



客服电话
Customer service call

0312-2122251



廣友橡膠
GUANG YOU XIANG JIAO

质量承诺

Quality commitment



质量是企业的生命，完善的质量保证体系是提高产品质量的可靠保证，我公司将产品质量放在公司发展的首要位置。

为了保证产品的质量稳定性，我公司配备了先进齐全的试验及检验设备，以保证试验数据的真实性和可靠性。技术方面，我公司与国内相关知名的高等院校和专家紧密联系，保证我公司的产品及技术处于国内领先地位。生产中使用国内最先进的橡胶生产设备，均采用PLC控制，自动化程度较高，有效地控制了工艺条件，为产品质量的稳定性提供了硬件保证。同时我公司制定并执行了一套严格的质量管理体系，主要原材料从国外进口，整个生产过程严格执行QC卡的管理，加强自检、互检和专检，对入库产品定期按照客户要求物理性能试验。我公司具有高精度模具加工能力，保证了产品的尺寸和外观质量。

公司通过了ISO9001质量管理体系认证。

Quality is the life of the enterprise, perfect quality assurance system is a reliable guarantee to improve product quality, our company put product quality at the top of the company's development.

In order to ensure the quality and stability of products, our company is equipped with advanced and complete testing and inspection equipment to ensure that the authenticity and reliability of test data. In terms of technology, our company is closely related to domestic well-known institutions of higher learning and experts close contact, to ensure that our products and technology in the domestic leading position. The most advanced rubber in China is used in production. Production equipment, all using PLC control, high degree of automation, effectively control the process conditions, for product quality the stability of provides hardware guarantees. At the same time, our company has formulated and implemented a strict quality management system, mainly raw materials imported from abroad, the whole production process strictly implement QC card management, strengthen self-inspection, mutual inspection and special inspection, right physical performance tests shall be carried out regularly for incoming products according to customer requirements. Our company has high precision mold processing capacity, protect the size and appearance quality of the product are proved.

The company has passed ISO9001 quality management system certification.

26 // 因为专业 · 所以更好
Because professional · so better

我们公司的承诺:可靠的质量/及时的供货/一切为了客户



河北广友橡胶制品制造有限公司

HEBEIGUANGYOU Rubber products manufacturing Co., Ltd.

公司地址: 定州市北方(定州)再生资源产业

园基地初加工区经六路008号

销售部: 河北省保定市七一东路2098号广友橡胶

TEL: 0312-2122251 15612913999

东南办事处: 15612913666

FAX: 0312-2122251

E-mail: hebei.guangyou@126.com

