


JK
金坤斯铝材



穿条机设备
Stripper equipment

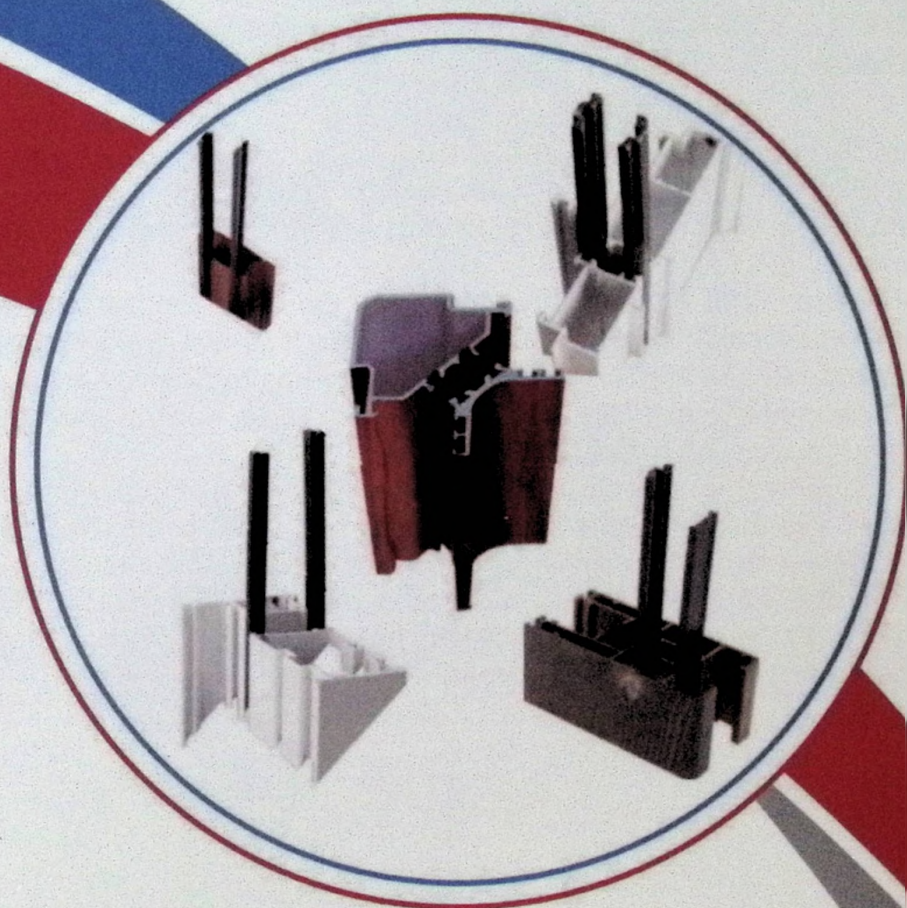

广东佛山市金坤斯铝材设备有限公司

Guangdong Foshan Jinkunsi Aluminum Equipment Co., Ltd..



微信二维码

佛山·南海
Foshan Naihαι

COMPANY PROFILE

企业简介

佛山市南海区金坤斯机械设备有限公司地处珠江三角洲腹地，中国铝材行业之都大沥镇，是一家研制、开发生产、制造、铝材配套设备的企业。

佛山市南海区大沥镇金坤斯机械设备有限公司，2005年独自创办机械行业，随着企业发展和国内外市场需求引进国外高端技术为核心和先进设备，打造铝材机械设备赢得各界同行业的好评。

本企业拥有大型的生产基地和专业的制造技术，庞大的管理队伍，理念与时俱进，不断创新，打造新的品牌。本企业生命力以“质量优先、信誉为重、管理为本、服务为诚”是我们一贯的追求，永恒不变的宗旨。我们将以创新、完美、和优质的产品，合理的价格，完美的售后服务成为你理想的合作伙伴。

Nanhai District, Foshan City, JINKUNSI Co. Ltd. is located in the hinterland of the Pearl River Delta, China's aluminum industry capital Dali Town, is a research, development, production, manufacturing, aluminum equipment supporting enterprises.

Nanhai District of Foshan City, JINKUNSI Co., Ltd, founded in 2005 alone machinery industry with the development of enterprises and domestic and foreign market demand for the introduction of foreign high-end technology as the core and advanced equipment machinery and equipment to create aluminum win all walks of life with the industry The praise.

The company has a large production base and professional manufacturing technology. a huge management team, ideas and both, continuous innovation create a new brand The vitality of the enterprise to "quality first credit standing. management-oriented sincere service is our consistent pursuit the eternal purpose. We will be innovative, perfect, and high quality products. reasonable prices, perfect after sales service to be your ideal partner.



OF SALE

销售地

销售地址及公司名称如下:

国外: 约旦, 加拿大, 阿尔及利亚, 越南, 柬埔寨。

广东省: 坚美, 凤铝, 亚铝, 兴发, 华南, 汇江, 朝捷, 佛山华昌, 江苏华昌, 言铝, 阿铝八八, 圣梵诺, 合辉, 巴斯顿, 星之铝, 依珞法, 华欧, 蒂莱斯, 钰煌。

山东省: 品创, 尚锋, 华建, 鑫茂。

浙江省: 栋梁, 华铝, 宏旭, 泰康, 辰和门窗, 天凌装饰。

湖北省: 华晨, 中鑫, 锦远, 卓群, 金桥, 骏辉。

江西省: 雄鹰, 华宇, 杨氏, 中安, 德善, 景宏, 泰安。

广西省: 坚美代总, 南南, 港亚, 国银, 兴城福集团, 青海, 欧莱德斯。

四川省: 望装饰工程, 新美渔, 美心集团, 圣曜, 西拓, 欧奥新材, 江苏遥观欣杰。

安徽省: 智中新, 恒强。

河南省: 明晟。

新疆省: 中亚铝业。

甘肃省兰州市: 华富装饰。

穿条厂: 永盛穿条厂, 鸣辉穿条厂, 镁锤森穿条厂, 联雄穿条厂。

其他: 盛伯年, 门窗港, 安弘科技, 罗兰蒂, 中茂建材有限公司, 广慧, 湘航, 卓福, 美好视界, 佳洁斯, 巨匠, 皇邦, 海螺, 昆明亚铝经销商, 南捷, 等等。

Foreign Countries: Jordan, Canada, Algeria, Vietnam, Cambodia. Guangdong province: Xingfa, South China, Fengal, Hujiang, Chaojie, AIAI, Foshan Huachang, Fengal, South China, Jiangsu Jinchuan, Jianmei, Yanal, AAL, BB San Vanno, hehui, Baston, Aai BB, ilofa, China Europe, tilles, Yu Huang. Shandong province: Pinchuang, Xiao Feng, Huajian, xiumao. Zhejiang province: Hongtu, Taikang, Chen and doors and windows, Tianling decoration, pillars, yttrium. Hubei Brilliance Auto, Zhongxin, Jinyuan, zhongxin, Jinqiao, Junhui. Jiangxi province: Eagle, Huayu, Yang, Nakayasu, Tekusen, Jinghong, Tai&UO9;an. Guangxi province: Jomei Daitichi, Nannan. Hong Kong Asia, Gaoyin, xingchengfu group, Qinghai, Oleides. Sichuan province: Wang Decoration project, ximeiyu, Heixin Group, Shengyao, nituo, occidental new material, Jiangsu Yuanquan Xinjie. Anhui province: Zhizhong Star, Hongjiang, Mingsheng, Henna. Sinkiang Province: Central Asian aluminium. Lanzhou city, Gansu Province: Huafu Decoration. Threading plant: Yongsheng threading plant, Ming Hui threading plant, magnesium threading plant, Liansheng threading plant. Others: Shanghai years, Door & window port, Anhong Technology, Rolante, zhongmao Building Materials Co., Ltd., Guanghui, Xianghang, Zhuofu, wonderful vision, crest, giant, huangbang, conch, Kunming Asia aluminium distributor, Nanjie, and so on.





阿尔及利亚客户



加拿大客户验收



加拿大客户验收



大型滚压机



阿尔及利亚客户



阿尔及利亚客户



阿尔及利亚客户



加拿大客户



加拿大客户


JKS

金坤斯铝材设备


金坤斯铝材设备有限公司



大型滚压机

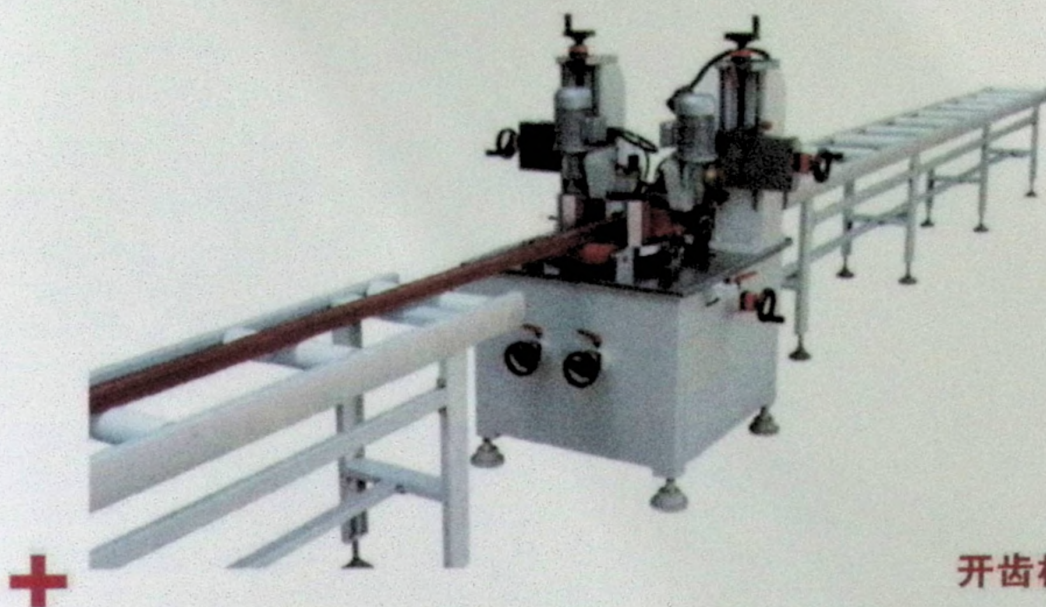

开齿机高配

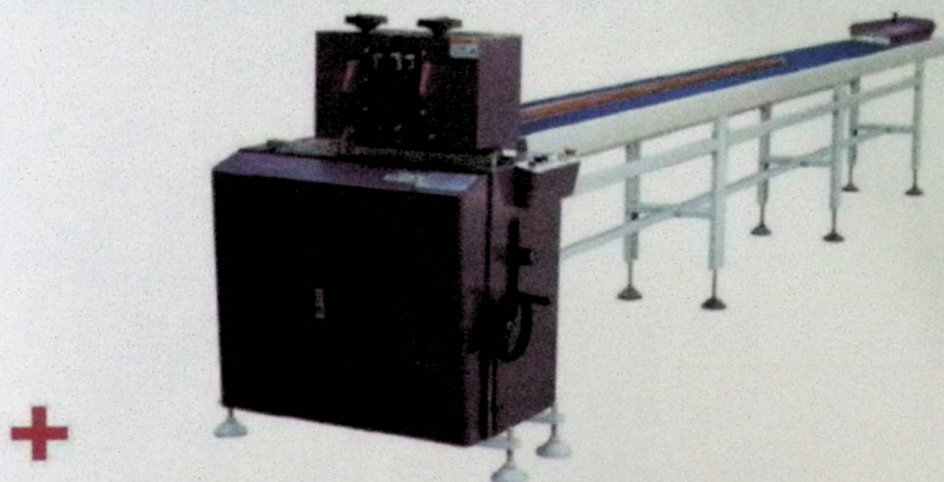


穿条机高配



滚压机高配

扶架：铝型材 500mmX6000mm 采用自动调节高度
占地面积：长 14950mmX 宽 5800mm

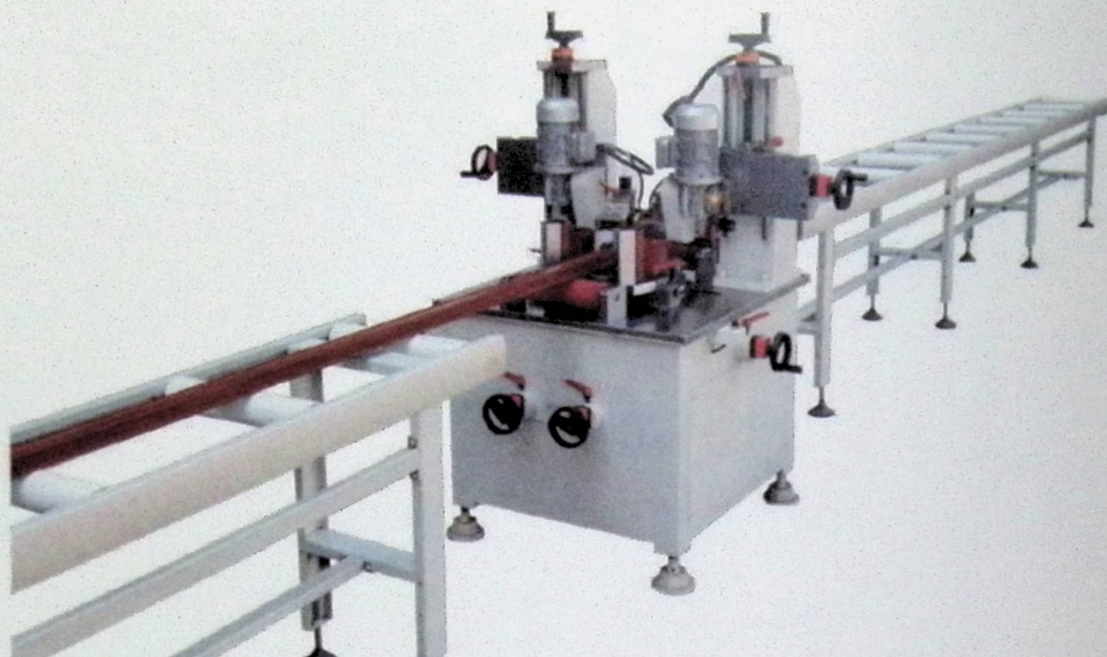

开齿机高配



滚压机高配

穿条机 (高配)


加工艺方式：已开齿型材→穿条，穿条机采用外型锯齿型的四轮驱动，通过导向将两根隔热条准确穿入铝材槽内，可调节穿条速度快慢，操作方便，提高生产效率。

Wear a machine (high match)

Processing method: open tooth profile wear article, article wear machine adopts exterior zigzag four-wheel drive, through the guide slot insulation will be two root accurately through the aluminum groove, adjustable in speed, easy to operate, improve production efficiency.

配置：进口（电机、西门子电器、电器控制）

Configuration：Imported motor, Siemens electrical appliances, electrical control

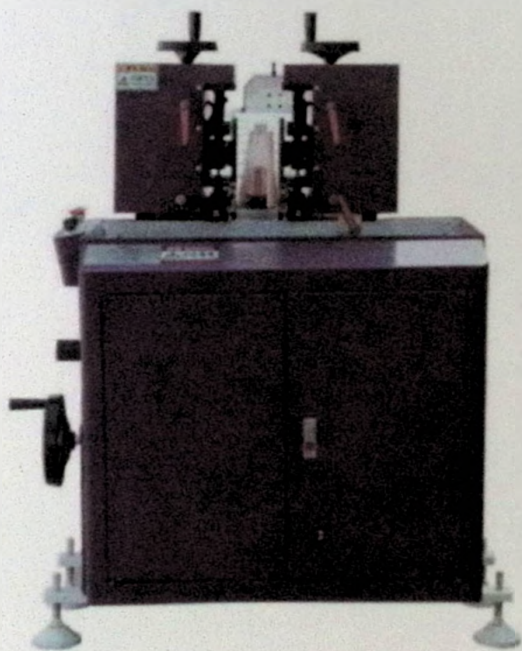

穿条机 (高配)

电压：380V

总功率：1.3kw

胶条高度：10mm-40mm

扶架：450mm X 7000mm

加工型材尺寸：230mm X 300mm

外形尺寸：800mm X 620mm X 1300mm

设备重量：≈ 520kg

Voltage: 380V

Total power: 1.3kw

Adhesive height: 10mm-40mm

Support frame: 450mm X 7000mm

Dimension of processing section: 230mm X 300mm

Dimensions: 620mm X 800mm X 1300mm

Equipment weight: ≈ 520kg







JKS

金坤斯铝材设备

穿条机 (高配)

金坤斯铝材设备有限公司

穿条机 (高配)

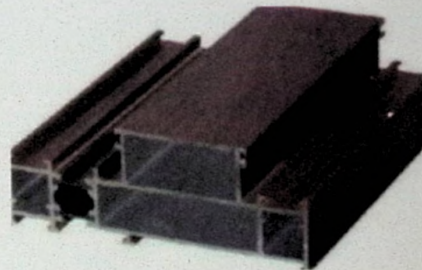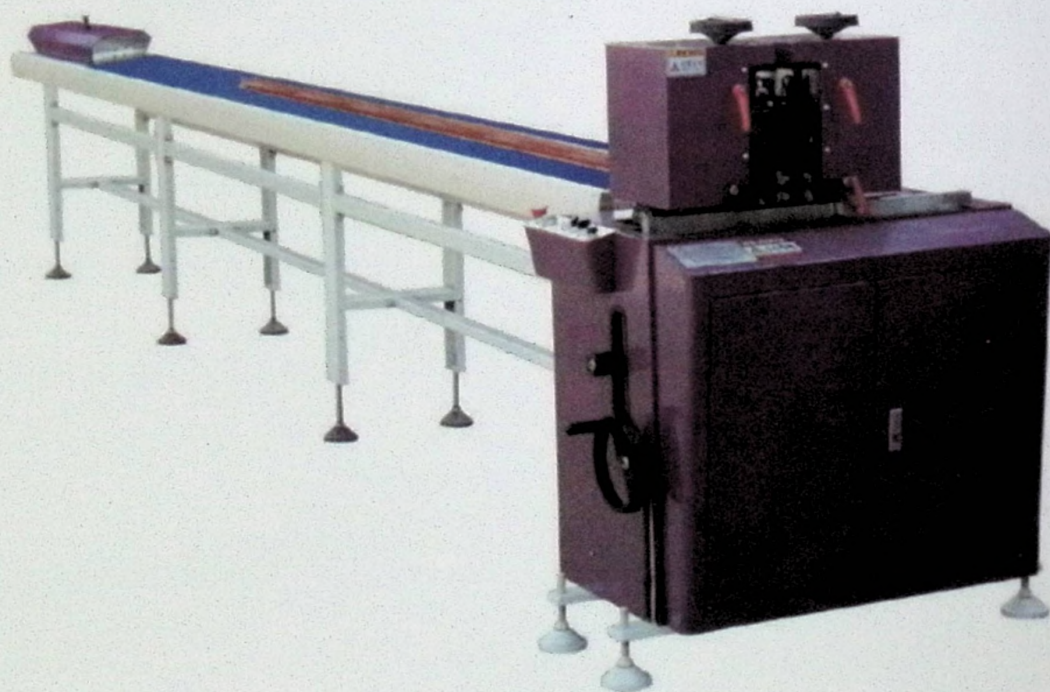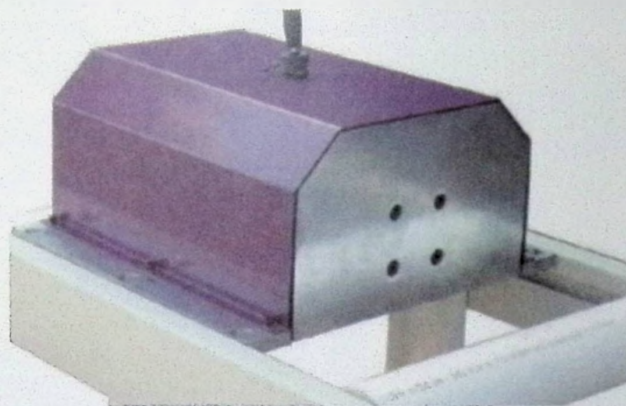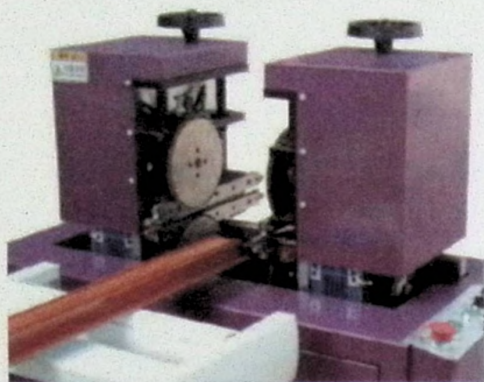

开齿机 (高配)

开齿机将隔热型材开齿、穿条两用，装置特殊的气动夹具，方便操作。开齿刀高速运转，将铝型材槽口部进行开齿，提高了铝型材的摩擦力和生产效率，研发了一组托轮、左右、上下调节，各种异形、工业型材都能加工。

Opening machine

Beveling machine will open the profile insulation, wearing a dual-use, special pneumatic fixture device, easy to operate. The high-speed operation of the toothed knife opens the notch of the aluminum profile to improve the friction and production efficiency of the aluminum profile. A series of support rollers have been developed to regulate the left and right, up and down, all kinds of special shapes and industrial profiles

配置: 台达 PLC、进口 (电机、变频器、减速机、电器控制)

Configuration: Imported motor, inverter, reducer, electrical control



开齿机 (高配)

电压: 380V
总功率: 1.5kw
胶条高度: 10mm-40mm
加工型材尺寸: 285mm X 325mm
外形尺寸: 1195mm X 1210mm X 1400mm
设备重量: ≈ 815kg
速度: 0-75m/min

Voltage: 380V
Total power: 1.5kw
Processing profile size: 285mm X 325mm
Dimensions: 1195mm X 1210mm X 1400mm
Equipment: ≈ 815kg
Speed: 0-75m/min






JKS

金坤斯铝材设备

开齿机 (高配)

金坤斯铝材设备有限公司

开齿机 (高配)

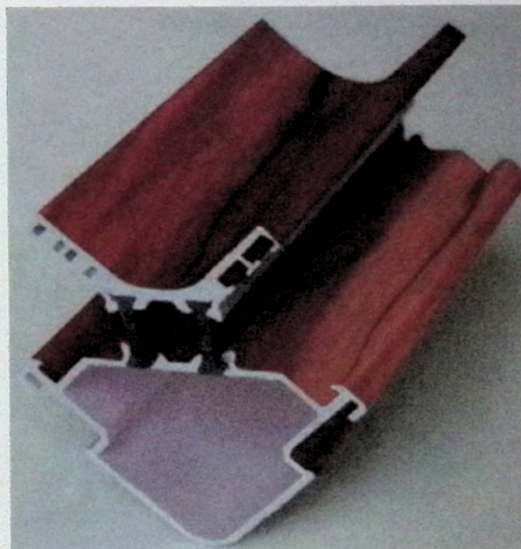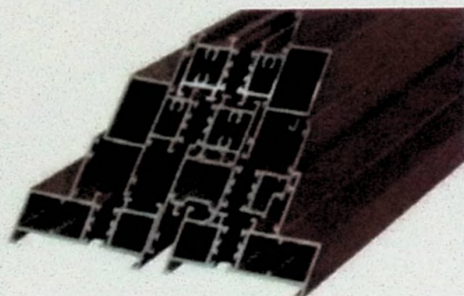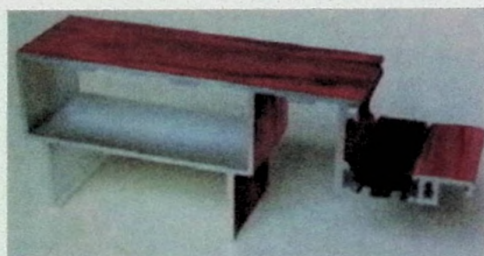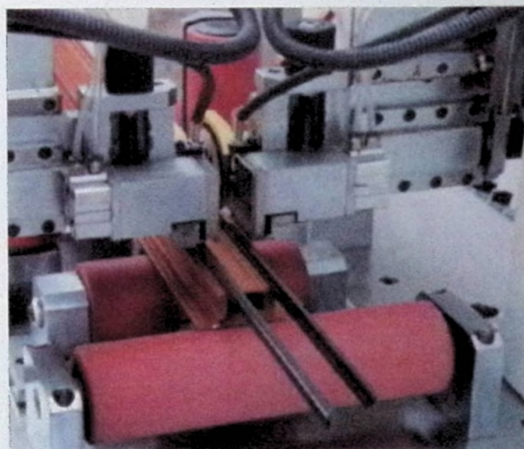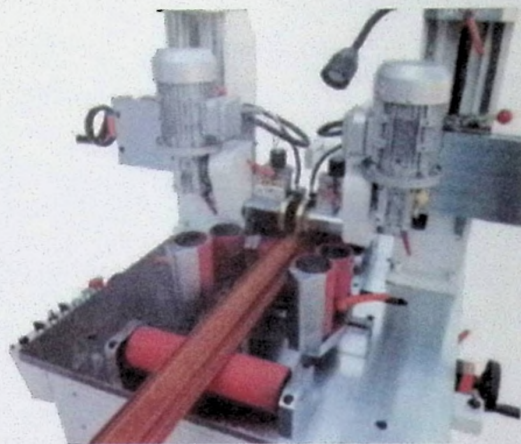

滚压机 (高配)

工艺方式：已开齿穿条型材→将型材滚压牢固

滚压机 (复合机) 是采用三组 (即 6 对 12 个) 滚压轮将已穿入隔热胶条的型材。经过滚压复合，达到胶条现型材紧密连接。

特点：采用三组高精度数字方式检测，能够准确地测出在滚压中型材每组压力。每组滚压轮可单独上下调节 (0-150mm)，每组两个滚压轮调节 (0-100mm)，整机可升降调节 (0-130mm)。出料扶架可单独升降调节 (0-120mm)。

Opening machine

Process: Has opened a tooth profile will be rolling profiles firm

Roller (compound machine) is the use of three groups (ie 6 to 12) rolling wheel will have penetrated the insulation profiles. After rolling compound, the strip is close to the current profile.

Features: Three sets of high-precision digital detection, can accurately measure the pressure in the rolling profile or each group. Each rolling wheel can be individually adjusted up and down (0-150mm), two rolling wheels in each group can be adjusted (0-100mm), the whole machine can be adjusted up and down (0-130mm). The discharge boom can be adjusted up and down separately (0-120 mm).

配置： 进口 (电机、变频器、减速机、电器控制)

Configuration: Imported motor, inverter, reducer, electrical control






滚压机 (高配)

电压: 380V
总功率: 3kw
加工型材尺寸: 285mm X 325mm
外形尺寸: 1530mm X 1405mm X 高 1465mm
设备重量: ≈ 1820kg
速度: 0-75m/min

Voltage: 380V
Total power: 3kw
Processing profile size: 285mm X 325mm
Dimensions: 1530mm X 1405mm X 1465mm
Equipment: ≈ 1820kg
Speed: 0-75m/min



滚压机 (高配)

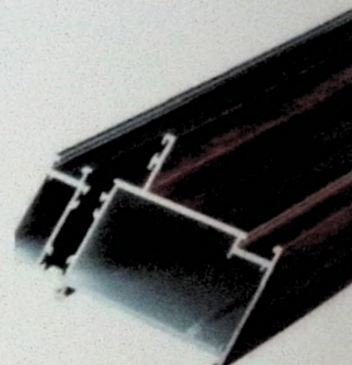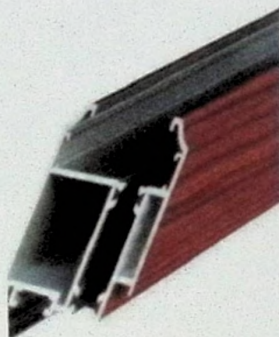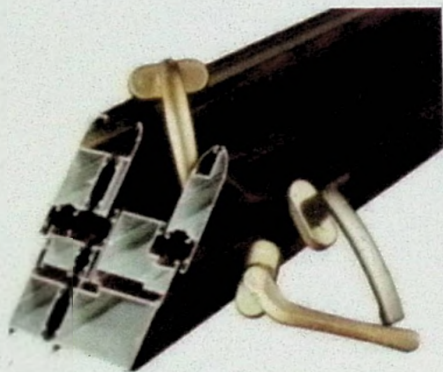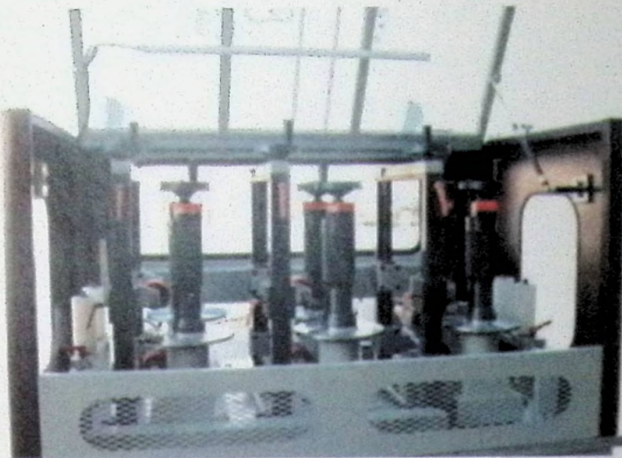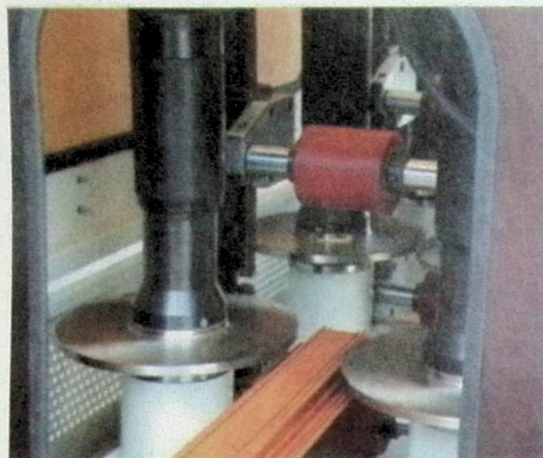

开齿机 (标配)

开齿机将隔热型材开齿、穿条两用，装置特殊的气动夹具，方便操作。开齿刀高速运转，将铝型材槽口部进行开齿，提高了铝型材的摩擦力和生产效率，研发了一组托轮、左右、上下调节，各种异形、工业型材都能加工。

Opening machine (standard)

Beveling machine will open the profile insulation, wearing a dual-use, special pneumatic fixture device, easy to operate. The high-speed operation of the toothed knife opens the notch of the aluminum profile to improve the friction and production efficiency of the aluminum profile.

配置： 国产 (电机、变频器、减速机、电器控制)

Configuration :

Domestic motor, inverter, reducer, electrical control

电压：380V

总功率：1.3kw

加工型材尺寸：250mm X 300mm

外形尺寸：860mm X 800mm X 1400mm

设备重量：≈ 500kg


Voltage: 380V

Total power: 1.3kw

Processing profile size: 250mm X 300mm

Dimensions: 860mm X 800mm X 1400mm

Equipment weight: ≈ 500kg

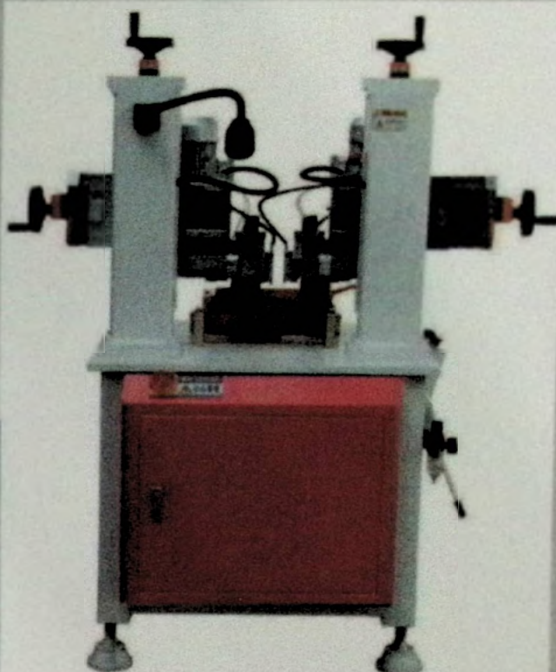**滚压机 (标配)**

采用3组12个压盘将开齿好的铝材与胶条滚压牢固。

全六驱动：受力均匀速度、快速高效、自动升降

Rolling machine (standard)

Using 3 sets of 12 pressure plate will be opened good aluminum and rubber rolling firm.

Full six-drive: uniform force fast, high efficiency, automatic lift

配置： 国产 (电机、变频器、减速机、电器控制)

Configuration :

Domestic motor, inverter, reducer, electrical control

电压：380V

总功率：3kw

加工型材尺寸：200mm X 300mm

外形尺寸：1450mm X 1080mm X 1500mm

设备重量：≈ 1200kg

速度：0-75m/min

Voltage: 380V

Total power: 3kw

Processing profile size: 200mm X 300mm

Dimensions: 1450mm X 1080mm X 1500mm

Equipment weight: ≈ 1200kg

Speed: 0-75m/min



半自动保护膜分切机



主要技术参数:

外形尺寸: 2500x1150x1200mm

电压: 380V

功率: 2.2KW


加工长度: 1600mm

分切纸卷: 中 250mm

纸心内径: $\Phi 76$ mm

工作方式: 气动

型材斜面贴膜机

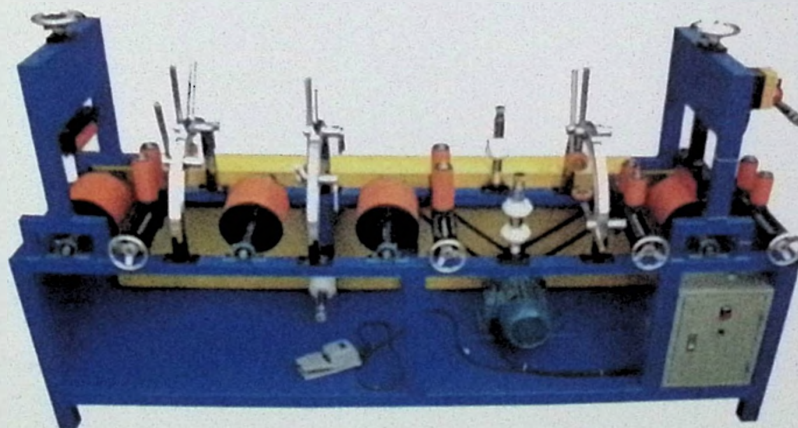

主要技术参数:

适合电源: 单相 220VAC50Hz

电机功率: 0.75KW

变频调速送料: 0~280m/min

最大贴膜尺寸: 宽 250mm/ 高 150mm

最大贴膜范围: 上下左右四面


外型尺寸: 长 1880x 宽 780x 高 1500mm

进料方向: 右进左出



放条架

检测机

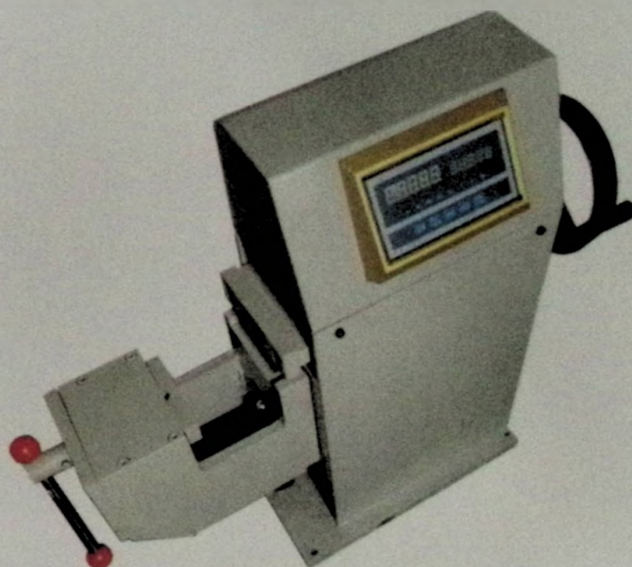



金坤斯铝材设备

地址：广东省佛山市南海区大沥镇太平南工业园

Add: Taiping South Industrial Park, Dali Town, Nanhai District, Foshan City, Guangdong Province

手机：189 3430 9475

Mobile: 189 3430 9475

电话：0757-81825127

Tel: 0757-81825127

邮箱：18934309475@163.com

Email: 18934309475@163.com

网址：www.jinkunsijx.com

Http: www.jinkunsijx.com



微信二维码