



姜凡 经理
18068038851




济南百超机械有限公司
苏州一站式销售服务中心

地址：江苏省苏州市相城区黄埭镇
电话/微信：18068038851

工业铝设备 新能源汽车设备

太阳能加工设备



in Walls

Intelligent Processing System

行业领先的门窗幕墙加工系统




扫描二维码 · 关注百超机械



百超机械
BAICHAO MACHINERY

LGS-CNC-7000 高速四轴数控加工中心

High-speed 4-axis CNC Processing Center

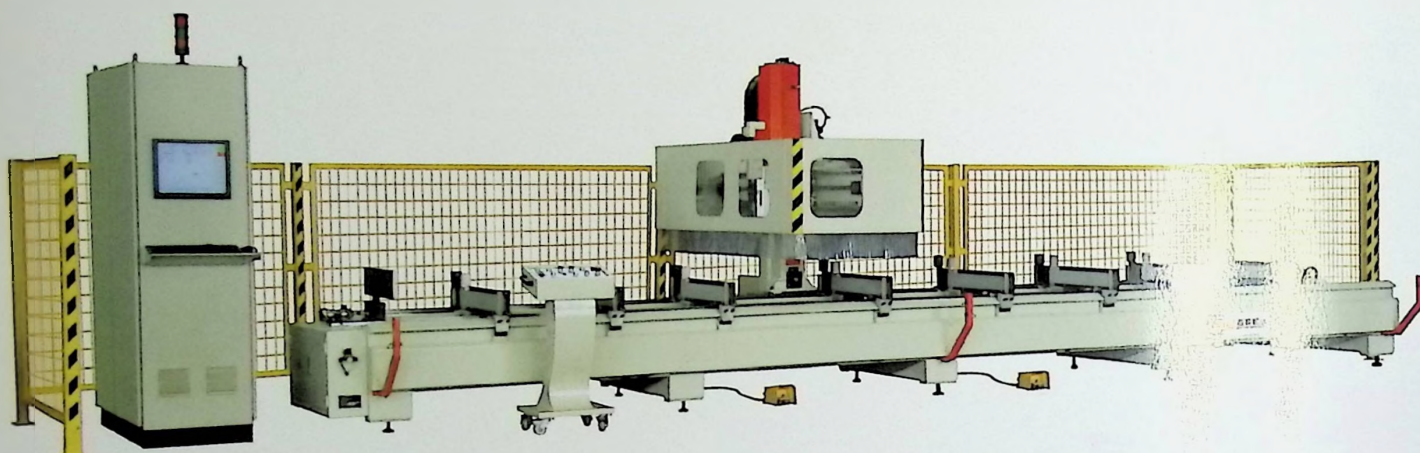


- 适用于铝型材、工业铝材、有色金属以及轻钢结构型材的安装孔、流水槽、铆孔等的加工。
- 数控系统采用日本安川伺服电机及驱动器，专业保证品质。
- 采用进口主轴，加工性能出色：旋转式8工位刀库，换刀迅速。
- 采用高品质钢管焊接，强度高、刚性大、稳定性好，经久耐用。
- 采用HIWIN导轨及丝杠，YYC研磨级齿条齿轮，确保设备精度。
- 双定位设计，上下料无需停机，具有更高的生产效率。
- 配备CAD-CAM软件，保证操作简便、直观，效率更高。
- 主要元器件采用国际知名品牌，设备稳定、安全，使用寿命长。
- It is designed for tapping, routing and milling holes, lock holes, launder and other slots on the profiles of curtain walls. It can work on various profiles.
- It adopts YASKAWA servo-motor and driver which are made in Japan.
- It adopts high speed HSD spindle of Italy
- It adopts HIWIN linear guide and YYC grinded gear racks result highly precise.
- It adopts high- quality computer control system, CAD-CAM software, which are used in industry area specially.
- Revolving six position mills makes the mill-changing convenient.
- Double profile locating devices, no need to stop the machine while taking the profiles on and off.
- With half-close safeguard device to insure the personal safety of the operator.

设备型号Model	LGS-CNC-7000	LXA-CNC-4500
电源功率Input voltage power	380V 50Hz 12Kw	380V 50Hz 12Kw
主轴功率Spindle power	7.5Kw	7.5Kw
主轴速度Spindle speed	0~24000r/min	0~24000r/min
X/Y/Z轴行程X/Y/Z-axes travel	7200mm / 1400mm / 600mm	4500mm / 900mm / 300mm
X/Y/Z轴速度X/Y/Z-speed	0~60m/min / 0~30m/min / 0~30m/min	0~60m/min / 0~30m/min / 0~20m/min
加工范围Process range	7000×650×280mm	4500×600×280mm
外形尺寸Overall dimension	11300×2400×2300mm	7000×2000×2300mm

LXA-CNC-4500 龙门三轴数控加工中心

High-speed 3-axis CNC Processing Center

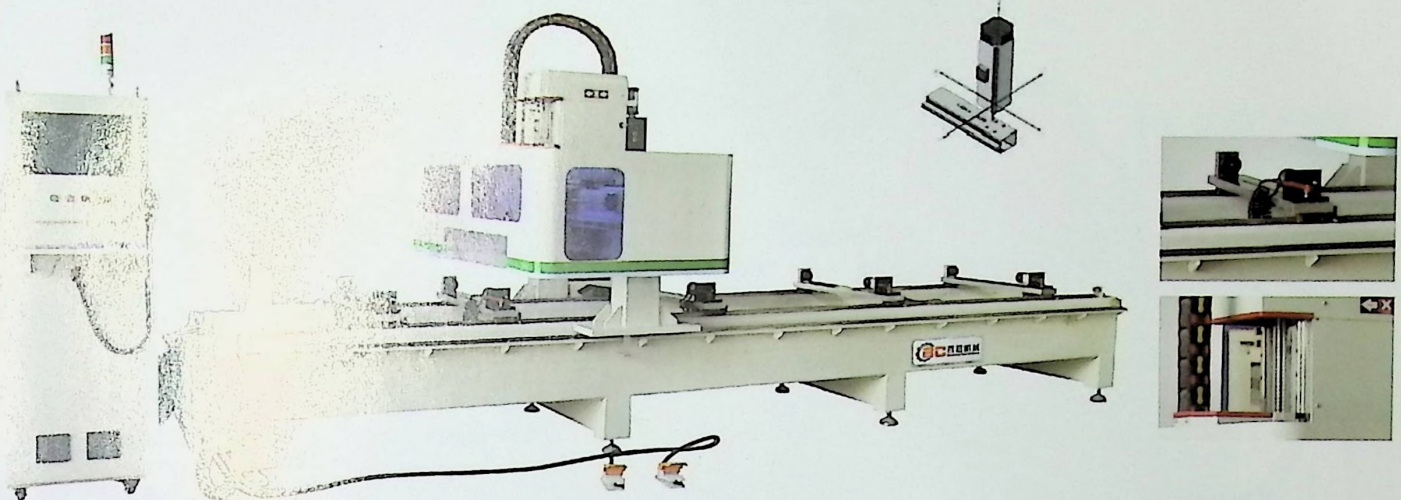

LZX-CNC-5000/3500/2500 铝型材数控钻铣床


Aluminum Profile CNC Drilling Milling Machine



设备型号Model	LZX-CNC-5000	LZX-CNC-3500	LZX-CNC-2500
电源功率Input voltage power	380V 50Hz 9.0Kw	380V 50Hz 7.0Kw	380V 50Hz 6.0Kw
主轴功率Spindle power	6.0Kw	4.5Kw	3.7Kw
主轴速度Spindle speed	0~18000r/min	0~18000r/min	0~18000r/min
X/Y/Z轴行程X/Y/Z-axes travel	5000mm / 300mm / 280mm	3500mm / 300mm / 280mm	2500mm / 300mm / 280mm
X/Y/Z轴速度X/Y/Z-speed	0~60m/min / 0~30m/min / 0~20m/min	0~60m/min / 0~30m/min / 0~20m/min	0~40m/min / 0~30m/min / 0~20m/min
加工范围Process range	5000×300×200mm	3500×120×120mm	2500×120×120mm
外形尺寸Overall dimension	5600×1500×1950mm	4000×1500×1950mm	3000×1500×1950mm

LZX-CNC-1200 铝型材数控钻铣床

Aluminum Profile CNC Drilling Milling Machine

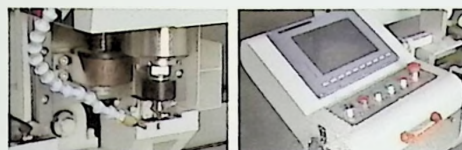

设备型号Model	LZX-CNC-1200
电源功率Input voltage power	380V 50Hz 10Kw
主轴功率Spindle power	3.5Kw
主轴速度Spindle speed	0-18000r/min
加工范围Process range	2200×1200×100mm
X轴行程X-axes travel	1200mm
X轴速度X-speed	0-30m/min
Y轴行程Y-axes travel	360mm
Y轴速度Y-speed	0-30m/min
Z轴行程Z-axes travel	280mm
Z轴速度Z-speed	0-20m/min
工作气压Air pressure	0.5-0.6MPa
外形尺寸Overall dimension	1600×1500×1950mm



LZX-CNC-550 铝型材数控钻铣床

Aluminum Profile CNC Drilling Milling Machine





设备型号Model	LZX-CNC-550
电源功率Input voltage power	380V 50Hz 5.5Kw
主轴功率Spindle power	3.5Kw
主轴速度Spindle speed	0-18000r/min
加工范围Process range	550×100×100mm
X轴行程X-axes travel	550mm
X轴速度X-speed	0-30m/min
Y轴行程Y-axes travel	300mm
Y轴速度Y-speed	0-20m/min
Z轴行程Z-axes travel	240mm
Z轴速度Z-speed	0-20m/min
工作气压Air pressure	0.5-0.6MPa
外形尺寸Overall dimension	1000×1500×1900mm

LJB2D-CNC-6000 铝型材复合角度数控双头切割锯(五轴)
5-Axis CNC Double-head Cutting Saw for Aluminum Profile

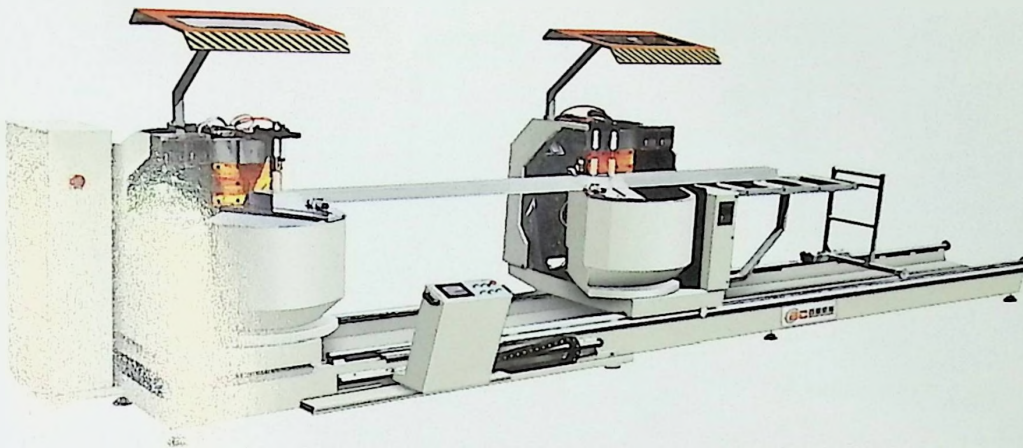


LJB2B-CNC-5000 铝型材任意角数控双头精密切割锯
CNC Variable Arbitrary Angle Double-head Cutting Saw

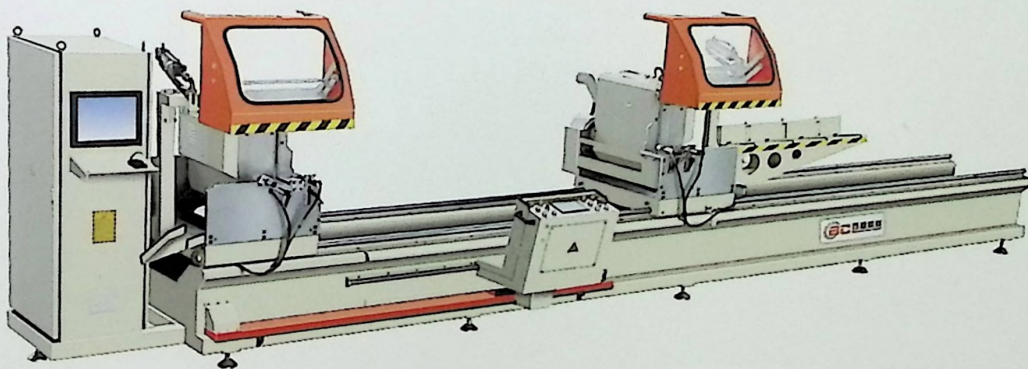


设备型号Model	LJB2D-CNC-6000	LJB2B-CNC-5000
电源功率Input voltage power	380V 50Hz 8.0Kw	380V 50Hz 6.5Kw
气压/耗气量Air pressure/consumption	0.6~0.8MPa / 300L/min	0.6~0.8MPa / 200L/min
电机转速Spindle speed	1840r/min	3200r/min
锯切尺寸Cutting size(L×W×H)	420~6000/5000×310/350×150/180mm	480~5000×120×230mm
锯切角度Cutting angle	45° ~ 90°	45° ~ 157.5°
进刀速度Saw feeding speed	0~3m/min	0~3m/min
外形尺寸Overall dimension	7700×1800×1550mm	6800×1500×2040mm

LJZ2-CNC-500×4200/5000 铝型材数控双头精密切割锯
CNC Double-head Cutting Saw for Aluminum Profile

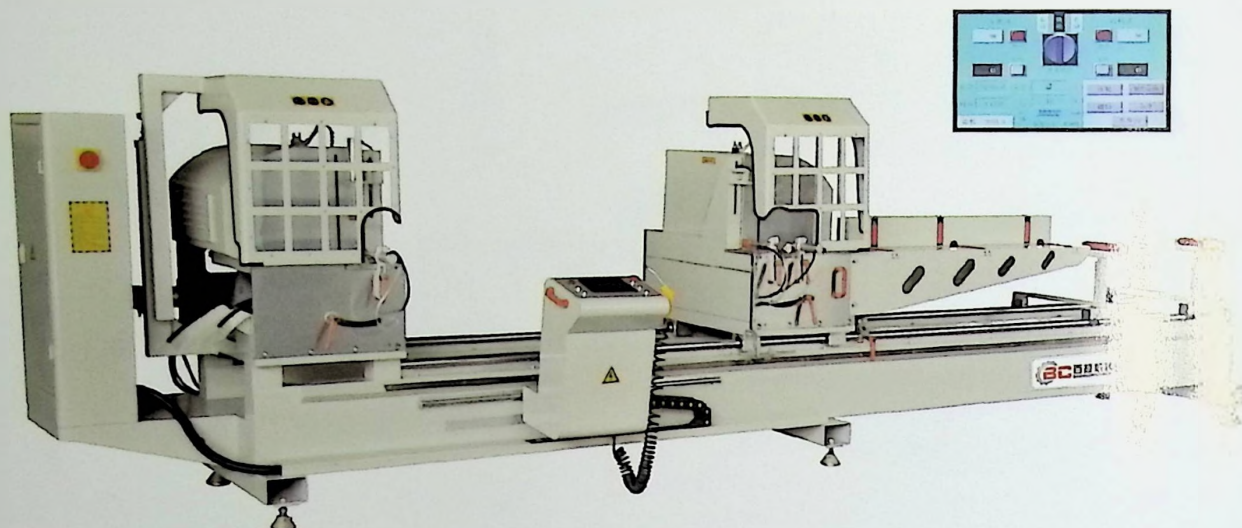


LJZ2-CNS-500×4200/5000 铝型材数显双头精密切割锯
CNS Double-head Cutting Saw for Aluminum Profile

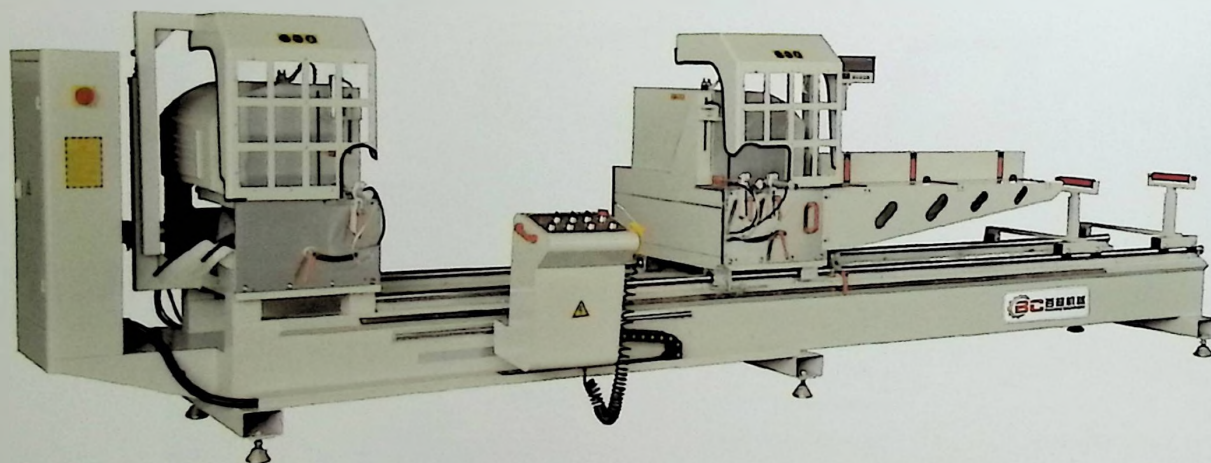


设备型号Model	LJZ2-CNC-500×4200/5000	LJZ2-CNS-500×4200/5000
电源功率Input voltage power	380V 50Hz 6.0Kw	380V 50Hz 4.5Kw
气压/耗气量Air pressure/consumption	0.5~0.8MPa / 200L/min	0.5~0.8MPa / 200L/min
电机转速Spindle speed	3200r/min	3200r/min
锯切尺寸Cutting size(L×W×H)	400~4200/5000×150×300mm	400~4200/5000×150×300mm
锯切角度Cutting angle	45° ~ 90°	45° ~ 90°
进刀速度Saw feeding speed	0~3m/min	0~3m/min
外形尺寸Overall dimension	5800(6300)×1700×1600mm	5800(6300)×1700×1600mm

LJZ2-CNC-550×4500 铝型材高效数控(数显)外45°双头切割锯
High Efficient Double-head Cutting Saw for Aluminum Profile

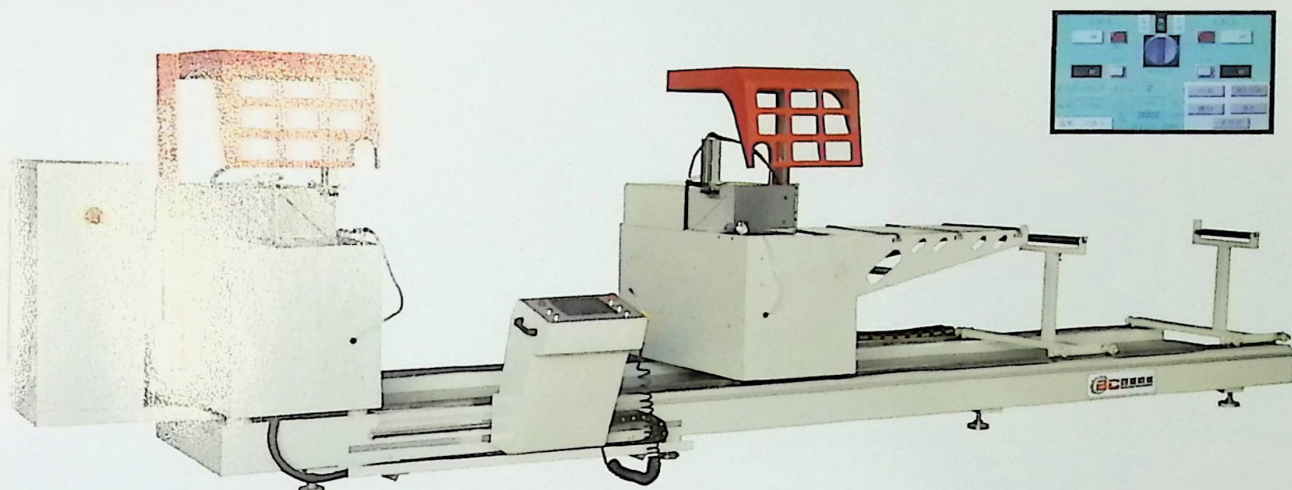


LJZ2-CNC-550×4500 铝型材高效数控(数显)内45°双头切割锯
High Efficient Double-head Cutting Saw for Aluminum Profile

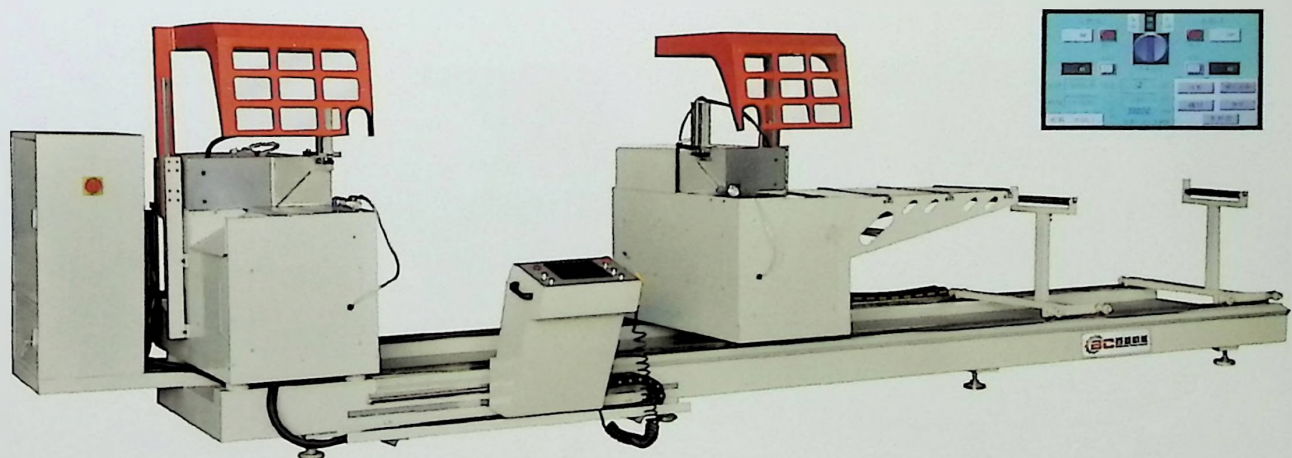


设备型号 Model	LJZ2-CNC-550×4500(外)	LJZ2-CNC-550×4500(内)
电源功率 Input voltage power	380V 50Hz 7.0Kw	380V 50Hz 6.0Kw
气压/耗气量 Air pressure/consumption	0.5~0.8MPa / 200L/min	0.5~0.8MPa / 200L/min
电机转速 Spindle speed	2800r/min	2800r/min
锯切尺寸 Cutting size(L×W×H)	480~4500×300×140mm	480~4500×300×140mm
锯切角度 Cutting angle	45°	45°
进刀速度 Saw feeding speed	0~3m/min	0~3m/min
外形尺寸 Overall dimension	6000×1550×1500mm	6000×1550×1500mm

LJG2-550×4200 铝型材(内外摆)双头精密切割锯
Double-head Precision Cutting Saw for Aluminum Profile

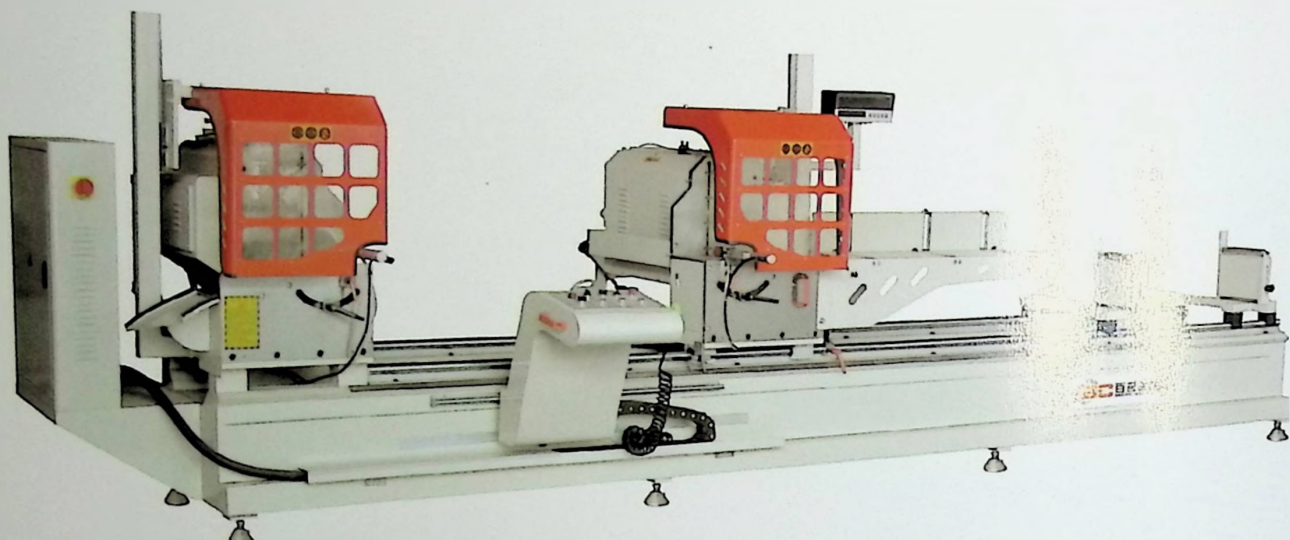


LJG-600 铝型材重型数显双头切割锯
Digital Display Double-head Precision Cutting Saw for Aluminum Profile

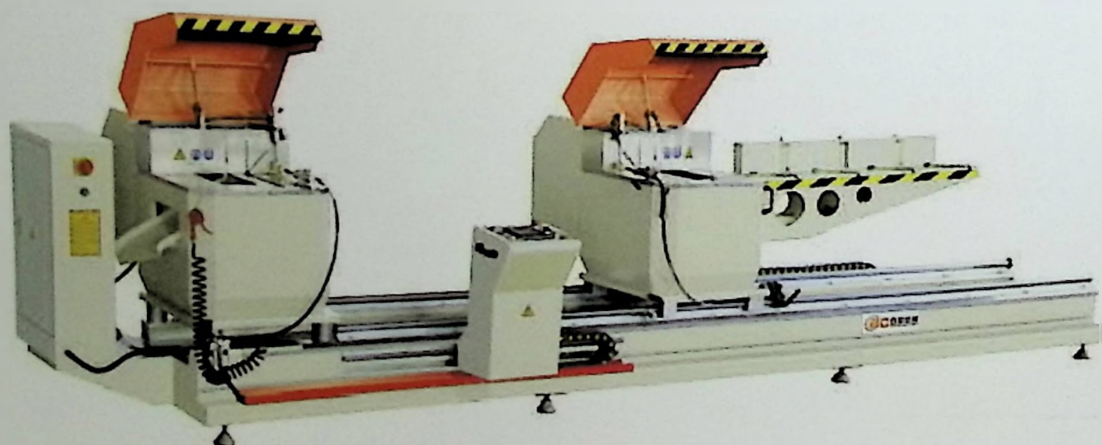


设备型号 Model	LJG2-550×4200	LJG-600
电源功率 Input voltage power	380V 50Hz 2×2.2Kw	380V 50Hz 2×3.0Kw
气压 / 耗气量 Air pressure/consumption	0.5~0.8MPa / 200L/min	0.5~0.8MPa / 200L/min
电机转速 Spindle speed	2800r/min	2800r/min
锯切尺寸 Cutting size(L×W×H)	4000(45°)/4200(90°)×180×250mm	450~4500×(45° 280×140)×(90° 300×160)mm
锯切角度 Cutting angle	45° 90° -45°	45° 90°
进刀速度 Saw feeding speed	0~3m/min	0~3m/min
外形尺寸 Overall dimension	5200×1750×1950mm	5900×1400×1600mm

LJZ2A-CNC-550×4500 铝型材数控双头精密切割锯
CNC Double-head Cutting Saw for Aluminum Profile

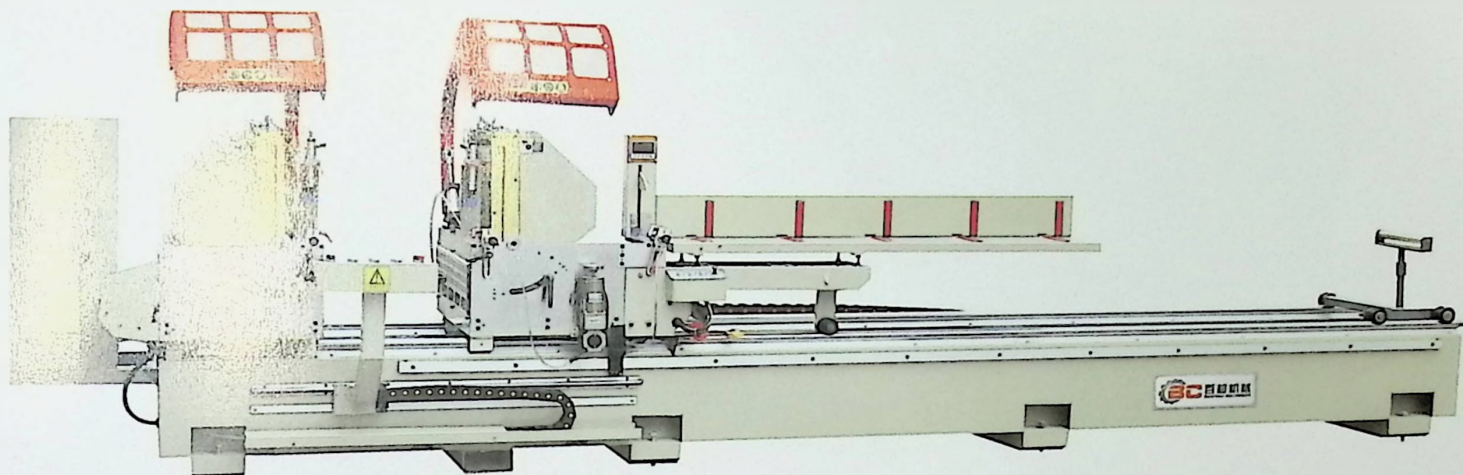


LJZ2A-450×3700 铝塑型材双头切割锯
Double-head Cutting Saw for Aluminum Profile

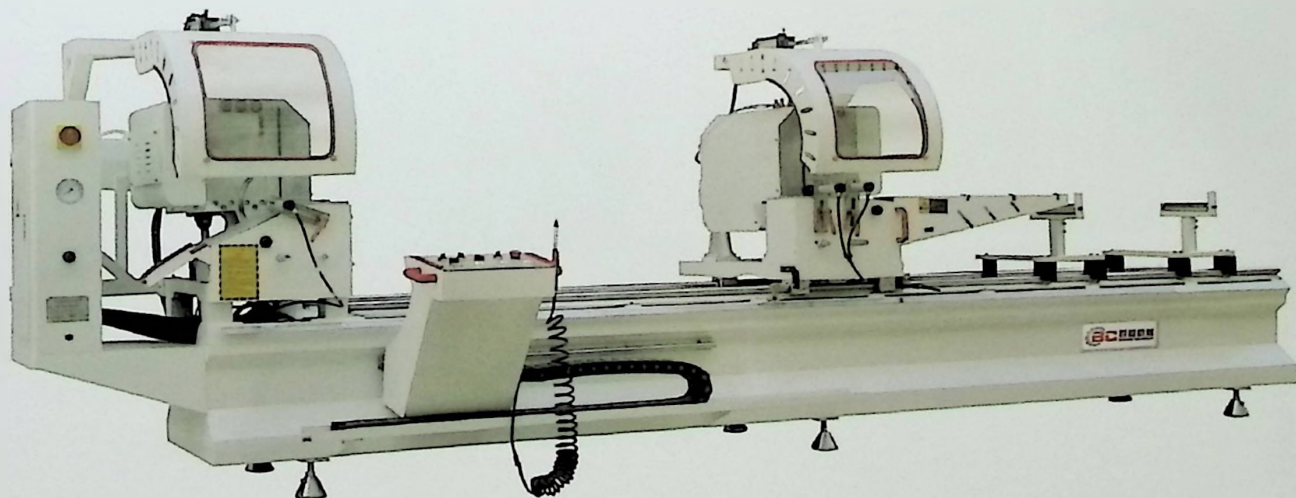

设备型号Model	LJZ2A-CNC-550×4500	LJZ2A-450×3700
电源功率Input voltage power	380V 50Hz 7.0Kw	380V 50Hz 2×1.5Kw
气压/耗气量Air pressure/consumption	0.5~0.8MPa / 200L/min	0.5~0.8MPa / 200L/min
电机转速Spindle speed	3000r/min	2800r/min
锯切尺寸Cutting size(L×W×H)	400~4500×170×300mm	450~3700×120×200mm
锯切角度Cutting angle	45° ~ 90°	45° ~ 90°
进刀速度Saw feeding speed	0~3m/min	0~3m/min
外形尺寸Overall dimension	6200×1300×1700mm	5000×1170×1400mm

LJZ2-450×3700 铝型材双头切割锯

Double-head Cutting Saw for Aluminum Profile

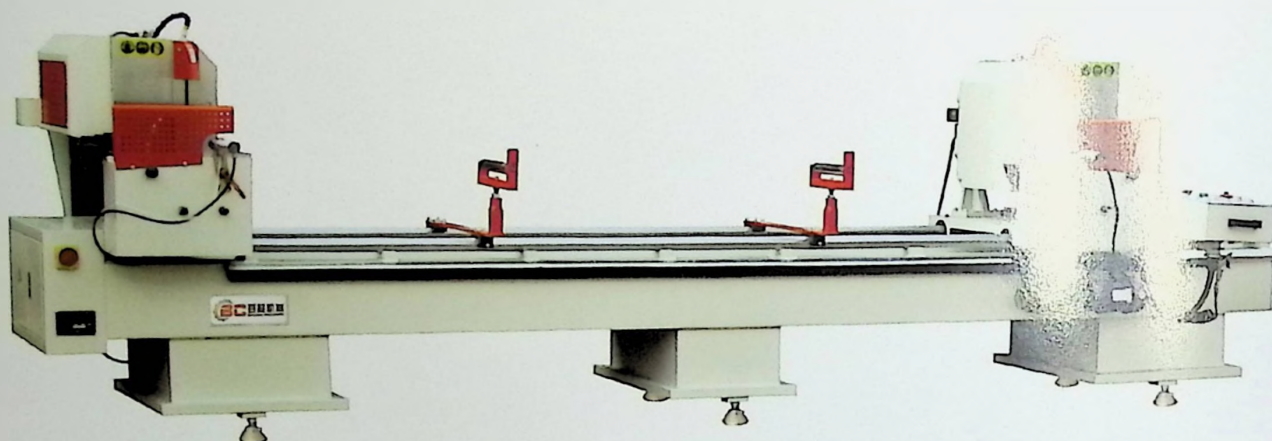

LJZD-600 铝型材单头任意角切割锯

Arbitrary Angle Single Mitre Saw for Aluminum Profile



设备型号Model	LJZ2-450×3700	LJZD-600
电源功率Input voltage power	380V 50Hz 3.55Kw	380V 50Hz 4.0Kw
气压/耗气量Air pressure/consumption	0.5~0.8MPa / 200L/min	0.5~0.8MPa / 100L/min
电机转速Spindle speed	2800r/min	3200r/min
锯切尺寸Cutting size(L×W×H)	580~3700×120×160mm	100~3500×350×175mm
锯切角度Cutting angle	90° 45° -45°	22.5° -22.5°
进刀速度Saw feeding speed	0~3m/min	0~3m/min
外形尺寸Overall dimension	4600×1300×1550mm	1100×1500×1800mm

LJZD-600 铝型材任意角平台锯
Platform Saw for Aluminum Profile



LJK-500 铝幕墙接口切割锯
Notching Saw for Aluminum Profile




LJZDY-600 铝型材液压切割锯
Heavy-duty Single-head Cutting Saw for Aluminum Profile



设备型号 Model	LJZD-600	LJK-500	LJZDY-600
电源功率 Input voltage power	380V 50Hz 3.0Kw	380V 50Hz 2×3.0Kw	380V 50Hz 5.5Kw
气压 / 耗气量 Air pressure/consumption	0.5~0.8MPa / 200L/min	0.5~0.8MPa / 200L/min	0.5~0.8MPa / 200L/min
电机转速 Spindle speed	2840r/min	2800r/min	2800r/min
锯切尺寸 Cutting size(L×W×H)	200×200×750mm	H 150mm	450×160mm
锯切角度 Cutting angle	60° -60°	45° -45°	90°
进刀速度 Saw feeding speed	0~3m/min	0~3m/min	0~3m/min
外形尺寸 Overall dimension	2000×1280×1200mm	3140×1380×1800mm	1300×2000×1500mm

LJJ-CNC-500 铝型材高效数控全自动角码切割锯
High Efficient CNC Full Automatic Corner Connector Cutting Saw

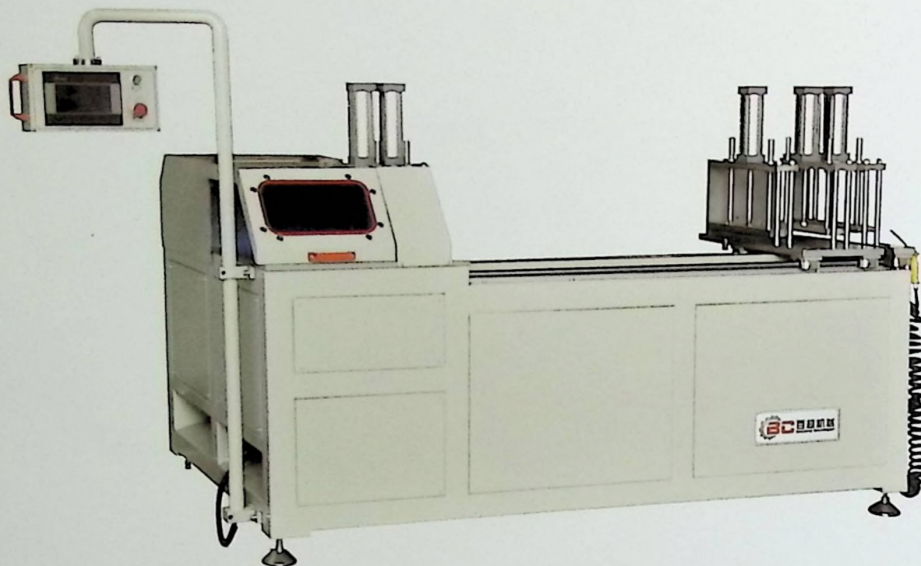



LJJ-CNC-500 铝型材数控全自动角码切割锯
CNC Corner Connector Auto Cutting Saw

LJJ-450 铝型材全自动角码切割锯
Corner Connector Auto Cutting Saw




设备型号 Model	LJJ-CNC-500	LJJ-CNC-500	LJJ-450
电源功率 Input voltage power	380V 50Hz 4.0Kw	380V 50Hz 3.0Kw	380V 50Hz 2.2Kw
气压 / 耗气量 Air pressure/consumption	0.5~0.8MPa / 150L/min	0.5~0.8MPa / 150L/min	0.5~0.8MPa / 150L/min
电机转速 Spindle speed	2800r/min	2800r/min	2800r/min
锯切尺寸 Cutting size(W×H)	350×140mm	300×140mm	200×135mm
送料长度 Feeding length	5~1000mm	5~700mm	5~300mm
进刀速度 Saw feeding speed	0~3m/min	0~3m/min	0~3m/min
外形尺寸 Overall dimension	2500×1200×1650mm	1500×1450×1600mm	1200×1400×1600mm

LXD-250Z 铝型材走刀自动端面铣床
Feed Knife Auto End Milling Machine for Aluminum Profile

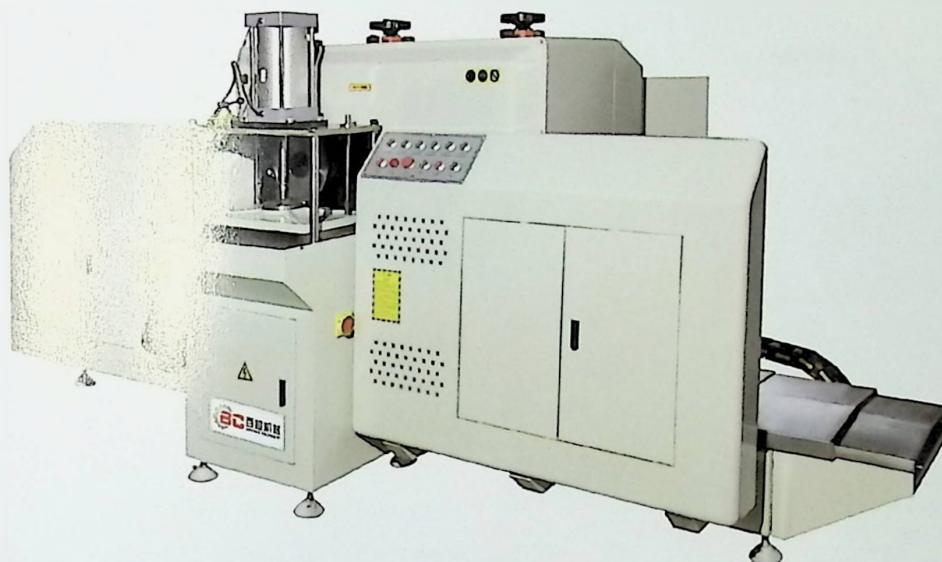

LXDB05-250 铝型材重型自动端面铣床
Heavy-duty End Milling Machine for Aluminum Profile

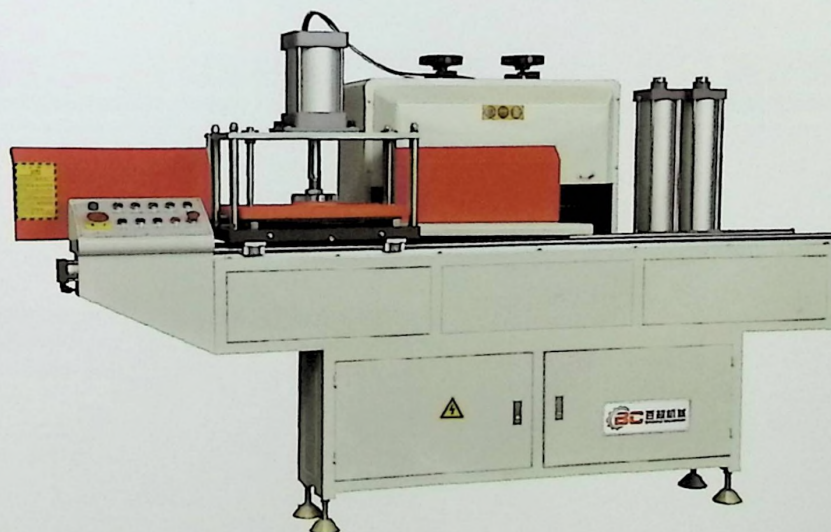

设备型号Model	LXD-250Z	LXDB05-250
电源功率Input voltage power	380V 50Hz 4×2.2Kw	380V 50Hz 2×2.2+1.1Kw
气压/耗气量Air pressure/consumption	0.6~0.8MPa / 150L/min	0.5~0.8MPa / 150L/min
电机转速Spindle speed	2800r/min	2800r/min
进给行程Feeding range	1600mm	1400mm
调整行程Adjustment range	0~85mm	0~85mm
主轴直径Milling cutter diameter	φ 250×φ 32mm	φ 250×φ 32mm
外形尺寸Overall dimension	3080×1160×1600mm	2680×1020×1600mm

LXDB-200A 铝型材双轴走刀端面铣床

Two Knife Auto End Milling Machine for Aluminum Profile



设备型号Model	LXDB-200A
输入电源Input voltage	380V 50Hz
输入功率Input power	2×3.0Kw
工作气压Air pressure	0.6~0.8MPa
耗气量Air consumption	150L/min
电机转速Spindle speed	2800r/min
进给行程Feeding range	1200mm
调整行程Adjustment range	0~85mm
主轴直径Milling cutter diameter	φ 250× φ 32mm
外形尺寸Overall dimension	3080×1160×1600mm

LXDB-200B 铝型材自动端面铣床

Auto End Milling Machine for Aluminum Profile





设备型号Model	LXDB-200B
输入电源Input voltage	380V 50Hz
输入功率Input power	2×2.2Kw
工作气压Air pressure	0.6~0.8MPa
耗气量Air consumption	150L/min
电机转速Spindle speed	2840r/min
进给行程Feeding range	1050mm
调整行程Adjustment range	0~85mm
主轴直径Milling cutter diameter	φ 200× φ 32mm
外形尺寸Overall dimension	1200×680×1400mm



LXD-200 铝型材自动端面铣床
Auto End Milling Machine




LXF-370×125 高效单头仿形铣床
Single-head Copy Router

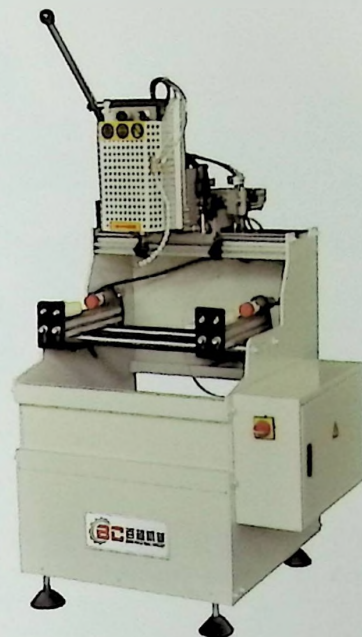


LXF-275×125 铝型材高速仿形铣床
Single-head Copy Router

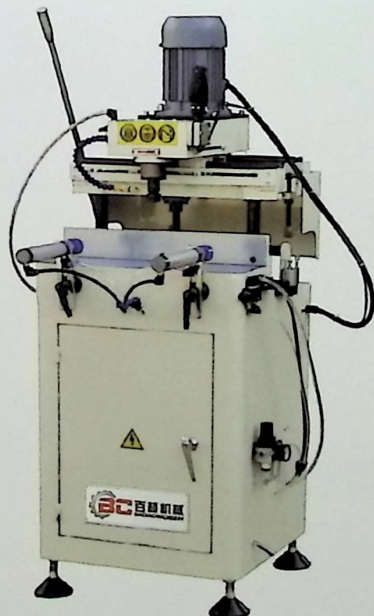

LZF3-300×100 铝型材锁孔槽加工机
Lock Hole Processing Machine

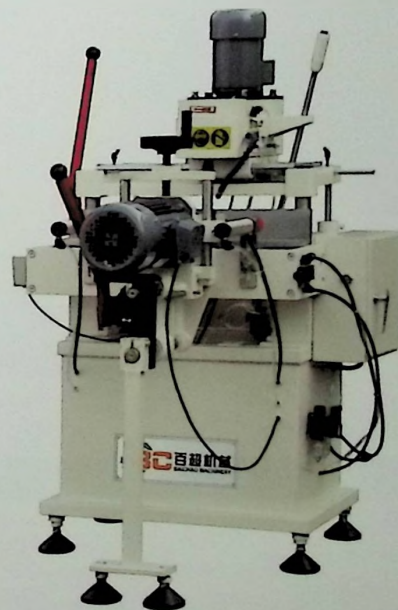


LWX-3000 铝模板立式铣槽机
Aluminum Template Vertical Milling Machine

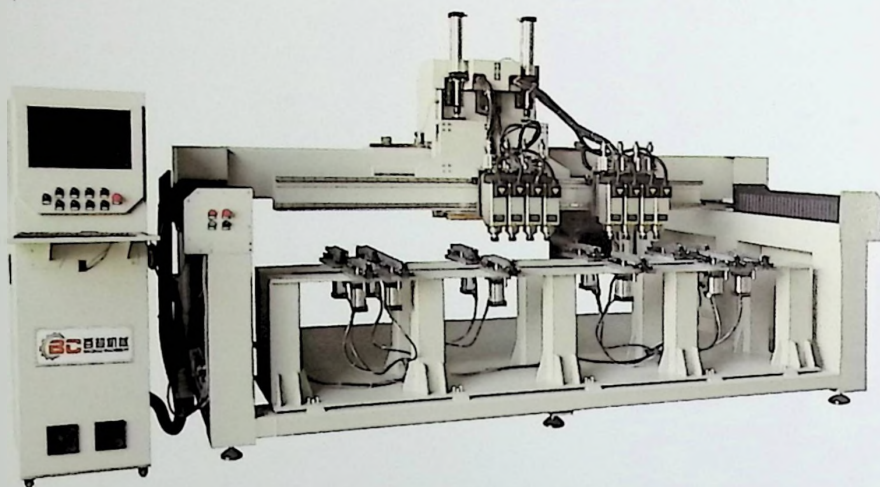

LYA-60 铝型材液压冲床
Punching Machine



LZZ4 铝幕墙多头组合钻床
Multi-head Combination Drilling Machine

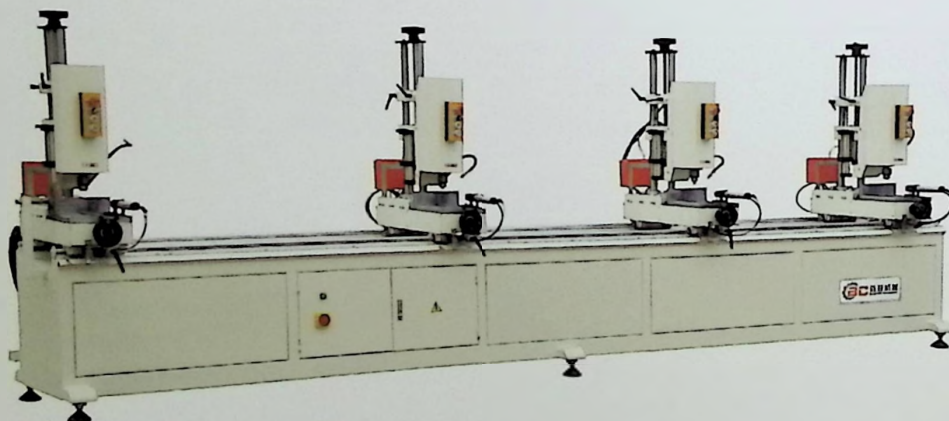

LY-T16 铝型材气动冲床
Punching Machine



LY-T30 铝型材液压冲床
Punching Machine



设备型号Model	LZZ4	设备型号Model	LZZ4
输入电压Input voltage	380V 50Hz	工作气压Air pressure	0.5~0.8MPa
输入功率Input power	4.4kw	气压/耗气量Air consumption	100L/min
工作行程Travel	125mm	两孔最大距离Max.distance of holes	5000mm
电机转速Motor speed	1400r/min	外形尺寸Overall dimension	5500×1000×1900mm



LME2-3000 铝模板双头铣筋机
Aluminum Template Double-head Milling Machine



LSKJ-01 铝门窗锁盒机
Lock Box Milling Machine



LM4-CNC-1800×3200A 铝门窗数控四头组角机
CNC Vertical Four-point Corner Crimping Machine

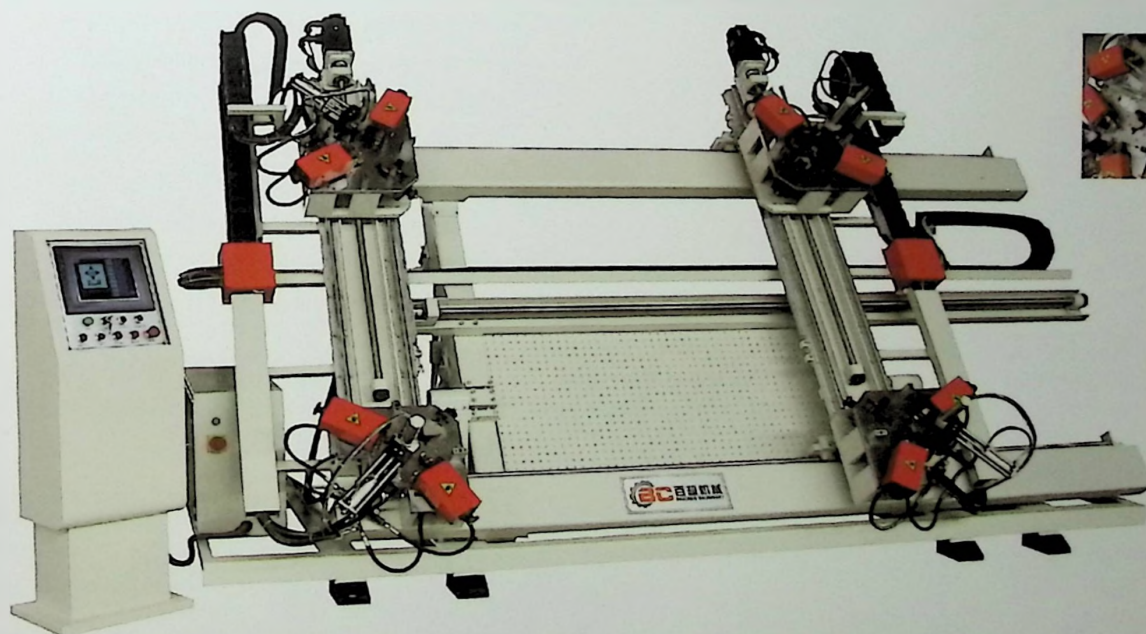

项目 Items	参数 Parameter	项目 Items	参数 Parameter
输入电源 Input voltage	380V 50Hz	油箱容量 Oil capacity	40L
输入功率 Input power	7.5Kw	加工型材宽度 Profile width	≤100mm
额定油压 Hydraulic pressure	15Mpa	组装最大框尺寸 Max. dimension	1800×3200mm
工作气压 Air pressure	0.5~0.8MPa	组装最小框尺寸 Min. Dimension	500×500mm
耗气量 Air consumption	0.45L/次	外形尺寸 Overall dimension	4500×2000×2600mm

LMB-A-120 铝门窗同步组角机


Single-head Corner Crimping Machine



设备型号	LMB-A-120	
电源功率	Input voltage power	380V 50Hz 1.5Kw
工作气压	Pressure	0.5~0.8MPa
耗气量	Consumption	0.2L/次
额定油压	Hydraulic pressure	15Mpa
油箱容量	Oil capacity	20L
型材高度	Profile height	120mm
组角压力	Corner general pressure	48KN
缝隙误差	Seam error	≤0.15mm
外形尺寸	Overall dimension	1000×1000×1200mm

LMB-120 铝门窗重型组角机

Single-head Heavy Duty Corner Crimping Machine

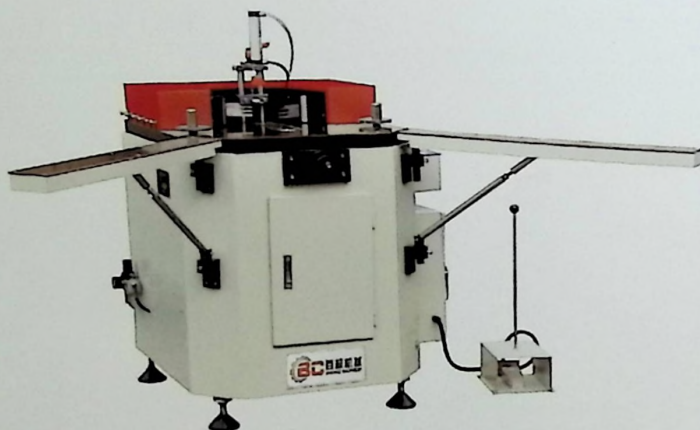

设备型号Model	LMB-120	
电源功率	Input voltage power	380V 50Hz 2.2Kw
工作气压	Air pressure	0.5~0.8MPa
耗气量	Air consumption	0.2L/次
额定油压	Hydraulic pressure	15Mpa
油箱容量	Oil capacity	20L
型材高度	Profile height	120mm
组角压力	Corner general pressure	48KN
缝隙误差	Seam error	≤0.15mm
外形尺寸	Overall dimension	1200×1200×1300mm

LMB-140 铝门窗重型组角机

Single-head Heavy Duty Corner Crimping Machine



设备型号Model	LMB-140	
电源功率	Input voltage power	380V 50Hz 3.0Kw
工作气压	Air pressure	0.5~0.8MPa
耗气量	Air consumption	0.2L/次
额定油压	Hydraulic pressure	20Mpa
油箱容量	Oil capacity	20L
型材高度	Profile height	120mm
组角压力	Corner general pressure	48KN
缝隙误差	Seam error	≤0.15mm
外形尺寸	Overall dimension	1250×1250×1400mm



LFH-02 隔热断桥铝型材复合机

Hydraulic Pressure Machine for Heat Insulation Profile



LKC-02 铝型材开齿穿条一体机

Knurling and Strip-inserting Machine

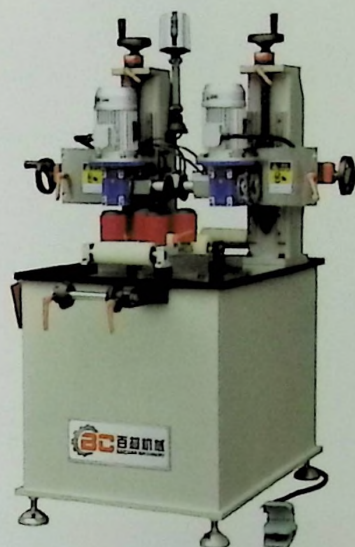

设备型号Model	LFH-02
电源功率Input voltage power	380V 50Hz 3.5Kw
加工速度Work speed	0~70m/min
加工尺寸Work size	280×280mm
辊压轮直径Roller wheel diameter	φ 230mm
扶架尺寸Auxiliary frame	500×5500mm
进给速度Work speed	6~60/min
外形尺寸Overall dimension	1000×1100×1550mm

设备型号Model	LKC-02
电源功率Input voltage power	380V 50Hz 3.0Kw
加工速度Work speed	0~70m/min
加工尺寸Work size	220×250mm
辊压轮直径Roller wheel diameter	φ 90mm
扶架尺寸Auxiliary frame	500×5500mm
进给速度Work speed	6~60/min
外形尺寸Overall dimension	1000×1100×1550mm

JWY03-CNC-180 数控弯圆机


CNC Profiles Bending Machine



设备型号Model	JWY03-CNC-180
输入电源Input voltage	380V 50Hz
输入功率Input power	3.0Kw
加工最大宽度Max. width	150mm
滚轮模具直径Max. diameter rolls	φ 180mm
滚轮主轴直径Spindle diameter	φ 60mm
液压缸压力Hydraulic pressure	160KN
主轴速度Spindle speed	1~8r/min
外形尺寸Overall dimension	1250×1050×1050mm

SHP4-CNC-3000B 塑料门立式数控四角焊接机


CNC Vertical Four-point Welding Machine For PVC Win-doos

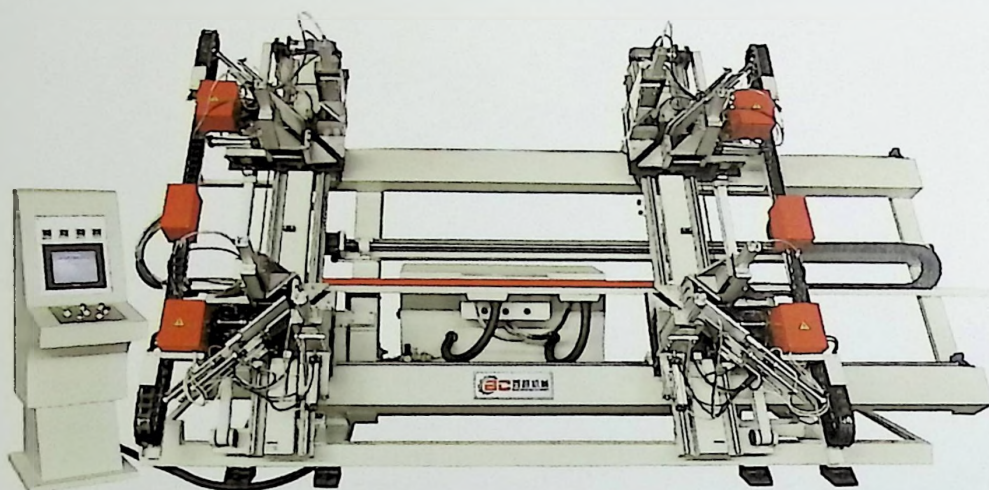

CNC-3000B	
输入电压Input voltage	380/220V 50Hz
输入功率Input power	2.2Kw
工作气压Air pressure	0.4~0.6MPa
耗气量Air consumption	200L/min
焊接宽度Welding width	≤140mm
焊接高度Welding height	25~150mm
焊接范围Welding range	400×400~1800×3000mm
外形尺寸Dimension	4600×2000×2600mm

SHZ4G-120×4500 塑料门窗四位焊接机(直线轴承)


Four-head Welding Machine For PVC Win-doos

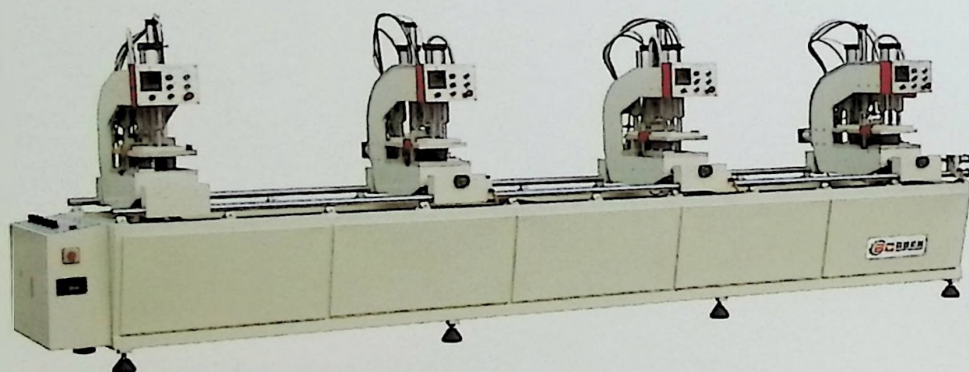

设备型号Model	SHZ4G-120×4500
输入电压Input voltage	380/220V 50Hz
输入功率Input power	4.5Kw
工作气压Air pressure	0.4~0.6MPa
耗气量Air consumption	200L/min
焊接长度Welding length	400~4500mm
焊接高度Welding height	20~120mm
外形尺寸Dimension	5300×950×1700mm


LJB2-350×3500(02B) 铝塑型材双头切割锯床

Double Mitre Saw For PVC Win-doos

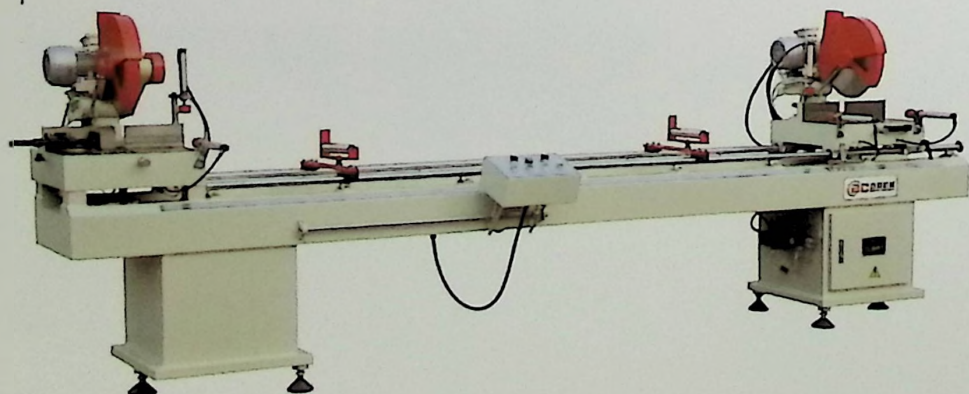


设备型号Model	LJB2-350×3500(02B)
输入电压Input voltage	380/220V 50Hz
输入功率Input power	2.2Kw
工作气压Air pressure	0.4~0.6MPa
耗气量Air consumption	100L/min
双切长度Cutting length	450~3500mm
切削宽度Cutting width	≤180mm
切削高度Welding height	≤100mm
外形尺寸Dimension	4100×1100×1400mm

SQJ-CNC-120B-6 塑料门窗智能数控角缝清理机
CNC Corner Cleaning Machine For PVC Win-doos



设备型号Model	SQJ-CNC-120B-6
输入电压Input voltage	380 50Hz
输入功率Input power	2.2Kw
工作气压Air pressure	0.5~0.7MPa
耗气量Air consumption	150L/min
加工宽度Profiles width	20~120mm
加工高度Profiles height	20~120mm
拉槽宽度Groove width	3±0.20mm
拉槽深度Groove depth	0.3±0.15mm
外形尺寸Dimension	1800×1000×1700mm

LJW-65 铝塑型材V型锯
V-cutting Saw For PVC Win-doos



SCXA-60 塑料门窗自动水槽铣
Water Slot Milling Machine



SYJW-1800 卧式玻璃压条锯
Glazing Bead Saw



产品以实物为准，设备改进、技术更新恕不另行通知。
All the pictures shown are subject to the true machinery.



全国销售服务热线

13864067003

济南百超机械有限公司
Jinan Bystronic Machinery Co., Ltd.

地址：中国·济南市天桥区大桥镇亚林工业园7号

Add: NO. 7, Yalin Industrial Park, Daqiao town, Jinan, China

电话(Tel): 0531-8866 8428 8826 6520 13864067003

传真(Fax): 0531-8866 8428

网址(Http): www.jnbaichao.com

邮箱(E-mail): 214041741@qq.com

